

09-26-00

Atty. Dkt. No. 76507/273



## THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Seiber et al.

Title: DISPLAY BOARD SYSTEM

Prior Appl. No.: 09/182,999

Prior Appl. Filing Date: 10/30/98

Examiner: To Be Determined

Art Unit: To Be Determined

CERTIFICATE OF EXPRESS MAILING	
I hereby certify that this correspondence is being deposited with the United States Postal Service's "Express Mail Post Office To Addressee" service under 37 C.F.R. § 1.10 on the date indicated below and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.	
EL640468053US	09/25/00
(Express Mail Label Number)	(Date of Deposit)
Chris Escoville	
(Printed Name)	
Chris Escoville	
(Signature)	

**CONTINUING PATENT APPLICATION**  
**TRANSMITTAL LETTER**

Assistant Commissioner for Patents  
 Box PATENT APPLICATION  
 Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is a:

[ X ] Continuation [ ] Division [ ] Continuation-In-Part (CIP)

of the above-identified copending prior application in which no patenting, abandonment, or termination of proceedings has occurred. Priority to the above-identified prior application is hereby claimed under 35 U.S.C. § 120 for this continuing application. The entire disclosure of the above-identified prior application is considered as being part of the disclosure of the accompanying continuing application and is hereby incorporated by reference therein.

Enclosed are:

- [ X ] Specification, Claims, and Abstract (37 pages).
- [ X ] Formal drawings (27 sheets, Figures 1-45).
- [ X ] Copy of Executed Declaration and Power of Attorney (5 pages).
- [ X ] Preliminary Amendment (9 pages).
- [ ] Assignment of the invention to Steelcase Development Inc.
- [ ] Assignment Recordation Cover Sheet.
- [ ] Check in the amount of \$40.00 for Assignment recordation.



☐ Small Entity statement.

☐ Information Disclosure Statement.

☐ Form PTO-1449 with copies of 187 listed references.

☒ Filing fee is calculated below:

	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$690.00	\$690.00
Total Claims:	38	- 20	= 18	x \$18.00	= \$324.00
Independents:	3	- 3	= 0	x \$78.00	= \$0.00
If any Multiple Dependent Claim(s) present:			+	\$260.00	= \$0.00
				SUBTOTAL:	= \$1014.00
<input type="checkbox"/> Small Entity Fees Apply (subtract 1/2 of above):					= \$0.00
				TOTAL FILING FEE:	= \$1014.00

☒ A check in the amount of \$1014.00 to cover the filing fee is enclosed.

☐ The required filing fees are not enclosed but will be submitted in response to the Notice to File Missing Parts of Application.

☒ The Assistant Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 06-1447. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Assistant Commissioner is authorized to charge the unpaid amount to Deposit Account No. 06-1447.

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date

9/25/00

By

*Scott D. Anderson*

FOLEY & LARDNER  
Firstar Center  
777 East Wisconsin Avenue  
Milwaukee, Wisconsin 53202-5367  
Telephone: (414) 297-5740  
Facsimile: (414) 297-4900

Scott D. Anderson  
Attorney for Applicant  
Registration No. 46,521

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Seiber, Charles Anthony )  
Arko, Robert Peter )  
DeRuntz, Otto Daniel )  
Stewart, William Charles )  
Takayama, Steven Rutaro )  
Friedman, Frank )  
Chan-Lizardo, Kristine Rene )  
Title: DISPLAY BOARD SYSTEM )  
App. No.: To Be Determined )  
Filing Date: To Be Determined )  
Prior App. No.: 09/182,999 )  
Prior Filing Date: 10/30/98 )  
Examiner: To Be Determined )  
Art Unit: To Be Determined )  
Atty. Dkt. No. 76507-273 )

CERTIFICATE OF EXPRESS MAIL

I hereby certify that this correspondence is being deposited with the United States Postal Service's "Express Mail Post Office To Addressee" service under 37 C.F.R. § 1.10 on the date indicated below and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

EL64046805305 09/25/00

(Express Mail Label Number)

(Date of Deposit)

Chris Escoville

(Printed Name)

Chris Escoville

(Signature)

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Prior to examination of the present Continuation Application, Applicants respectfully requests that the above-identified prior application be amended as follows:

In The Drawings

Please amend the Drawings as follows:

Replace informal drawings (FIGURES 1-45) with proposed formal drawings (FIGURES 1-45).

**In The Specification**

Please amend the specification as follows:

At page 1, line 9, replace "Serial No. \_\_\_\_\_ (Attorney Docket No. 26167-562)" with --Serial No. 09/182,998--.

At page 1, line 10, replace "and filed herewith" with --filed on October 30, 1998--.

At page 1, line 10, replace "(b) Serial No. \_\_\_\_\_" with --(b) Serial No. 09/183,023--.

At page 1, line 11, delete "(Attorney Docket No. 26167-563)".

At page 1, line 11, replace "and filed herewith" with --filed on October 30, 1998--.

At page 1, line 12, replace "Serial No. \_\_\_\_\_ (Attorney Docket No. 26167-564)" with --Serial No. 09/183,021--.

At page 1, line 13, replace "and filed herewith" with --filed on October 30, 1998--.

At page 1, line 13, replace "Serial No. \_\_\_\_\_" with --Serial No. 09/182,997--.

At page 1, line 13 through line 14, delete "(Attorney Docket No. 26167-568);".

At page 1, line 14, replace "filed herewith" with --filed on October 30, 1998--.

At page 1, line 14, replace "Serial No." with --Serial No. 09/182,999--.

At page 1, line 15, delete "\_\_\_\_\_" (Attorney Docket No. 26167-569)".

At page 1, line 15, replace "filed herewith" with --filed on October 30, 1998--.

At page 2, line 7, replace “(shared and communicated)” with --(e.g. shared and communicated)--.

At page 6, line 12, replace “perspective view” with --perspective views--.

At page 6, line 17, after “FIGURE 6 is a” insert --partially exploded--.

At page 6, line 27, after “FIGURE 11 is a fragmentary” insert --partially--.

At page 7, line 9, after “FIGURE 15 is a fragmentary” insert --partially--.

At page 7, line 11, after “FIGURE 16 is a fragmentary” insert --partially--.

At page 7, line 25, after “taken along line 21A-21A” insert --in FIGURE 21--.

At page 8, line 4, after “taken along line 23A-23A” insert --in FIGURE 23--.

At page 9, line 16, after “taken along line 34B-34B” insert --in FIGURE 34A--.

At page 11, line 5, after “Display board 100” insert --includes--.

At page 13, line 3, replace “Opening” with --The opening--.

At page 13, line 5, replace “shaped to receive curved exterior” with --shaped to receive the curved exterior--.

At page 15, line 11, replace “that is of same material” with --that is of the same material--.

At page 18, line 9, replace “also includes” with --also include--.

At page 21, line 8, replace “Figure 21” with --FIGURE 21--.

At page 23, line 16, replace “from rail 424” with --from rail 424,--.

At page 24, line 3, replace “for mounting frame 444” with --for

mounting frame 444,--

At page 25, line 1, replace "at one or more of its projecting guides 494" with --, at one or more of its projecting guides 494,--.

At page 25, line 3, replace "as holders for tool such as" with --as holders for tools such as--.

At page 29, line 27, replace "so that each display boards" with --so that each display board--.

At page 31, line 8, replace "Each of racks 220a and 220b includes" with --Each of racks 220a and 220b include--.

### **In The Abstract**

Please substitute the Abstract provided with the original Application with the new Abstract provided on a separate, single sheet (included herewith).

### **In The Claims**

Please cancel Claims 1-36 without prejudice.

Please add Claims 37-74 as follows:

- 1                   37.    A mounting structure for at least one display board providing a  
2   first mounting interface and a second mounting interface comprising:  
3                   a first pivotal interface including a first projection forming a retaining  
4   slot adapted to engage the first mounting interface of the display board; and  
5                   a second pivotal interface adapted to engage the second mounting  
6   interface of the display board;  
7                   so that the display board is adapted to be removably pivotally coupled to  
8   the mounting structure at both the first pivotal interface and the second pivotal interface.
- 1                   38.    The mounting structure of Claim 37 wherein the first projection is  
2   a hook.
- 1                   39.    The mounting structure of Claim 37 wherein the second pivotal  
2   interface includes a second projection having a post.

1                   40.    The mounting structure of Claim 38 wherein the second pivotal  
2   interface includes a second projection having a post.

1                   41.    The mounting structure of Claim 38 wherein the second pivotal  
2   interface is adapted to be generally coaxial with the second mounting interface.

1                   42.    The mounting structure of Claim 39 wherein the retaining slot of  
2   the first pivotal interface includes a retaining profile with a terminus for securing the  
3   first mounting interface of the display board.

1                   43.    The mounting structure of Claim 37 wherein the first pivotal  
2   interface is configured to at least partially grip the first mounting interface of the display  
3   board.

1                   44.    The mounting structure of Claim 37 further comprising a cap  
2   having the first pivotal interface and a base having the second pivotal interface.

1                   45.    The mounting structure of Claim 44 further comprising a frame  
2   coupling the cap to the base.

1                   46.    The mounting structure of Claim 45 wherein the frame is adapted  
2   for mounting to an existing structure.

1                   47.    The mounting structure of Claim 45 further comprising a cover  
2   fitted over the frame.

1                   48.    A mounting structure for display of at least one display board  
2   comprising:

3                   a frame;

4                   a compliant retaining system including a pair of spaced-apart members  
5   for the display board coupled to the frame, wherein at least one of the members is  
6   compliant;

7                   wherein the display board can be pressed into secure engagement  
8   between the members of the compliant retaining system.

1                   49.    The mounting structure of Claim 48 wherein an internal width  
2   between the compliant members is adapted to be less than a width of the display board.

1                   50.    The mounting structure of Claim 48 wherein the compliant  
2   members have an irregular surface for engaging the display board.

1                   51.    The mounting structure of Claim 48 wherein the compliant  
2   members are deformable.

1                   52.    The mounting structure of Claim 51 wherein the compliant  
2   retaining system for the display board includes at least one elastomeric grip member.

1                   53.    The mounting structure of Claim 51 wherein the compliant  
2   members are formed of an elastomeric material.

1                   54.    The mounting structure of Claim 51 wherein the compliant  
2   members include a plurality of projections.

1                   55.    The mounting structure of Claim 51 wherein the compliant  
2   members include a plurality of ribs.

1                   56.    The mounting structure of Claim 51 wherein the compliant  
2   members are grip members.

1                   57.    The mounting structure of Claim 56 wherein the grip members  
2   are mounted to the frame.

1                   58.    The mounting structure of Claim 56 wherein the grip members  
2   are curved.

1                   59.    The mounting structure of Claim 56 wherein the grip members  
2   are straight.

1                   60.    The mounting structure of Claim 56 wherein the grip members  
2   include a plurality of fins.

1                   61.    The mounting structure of Claim 60 wherein the fins are  
2   deformable and the display board may be retained between at least two fins of each grip  
3   member.

1                   62.    The mounting structure of Claim 48 wherein the compliant  
2   retaining system includes at least two compliant members.



1                   63.    The mounting structure of Claim 48 wherein the compliant  
2   retaining system includes at least four compliant members.

1                   64.    The mounting structure of Claim 63 wherein the display board is  
2   generally rectangular and the four compliant members are spaced to be positioned at  
3   approximately the corners of the generally rectangular display board.

1                   65.    The mounting structure of Claim 48 wherein the compliant  
2   members apply a securing force to the display board.

1                   66.    The mounting structure of Claim 48 wherein the frame is mobile.

1                   67.    The mounting structure of Claim 48 further comprising a platform  
2   for the display board coupled to the frame.

1                   68.    The mounting structure of Claim 67 wherein the frame is a wall  
2   providing a horizontally disposed panel and the platform rests on the shelf.

1                   69.    The mounting structure of Claim 67 wherein the frame is a wall  
2   and the platform is coupled to the wall by a mounting bracket.

1                   70.    The mounting structure of Claim 67 wherein the frame is an easel  
2   and the platform is a tray rigidly connected to the easel.

1                   71.    A mounting structure coupled to a floor and associated with an  
2   existing structure and for use with at least one display board comprising:

3                   an articulating frame pivotally coupled to the existing structure for  
4   movement between a fully deployed position and a fully stowed position; and

5                   at least one display rack coupled to the articulating frame and providing a  
6   first interface and a second interface for pivotal coupling of a plurality of display  
7   boards.

1                   72.    The mounting structure of Claim 71 wherein the first interface  
2   includes a hook.

1                   73.    The mounting structure of Claim 72 wherein the second interface  
2   includes a post.

1                   74.    The mounting structure of Claim 73 wherein the display rack is  
2    configured for positioning at least one of the display boards between a deployed position  
3    and a stowed position.

**REMARKS**

The Applicants respectfully submit that the present Application is in condition for allowance. The Applicants have cancelled original Claims 1-36 without prejudice. Claims 37-74 have been added. The Applicants request consideration and allowance of pending Claims 37-74.

The Applicants also expressly withdraw any and all claim amendments and remarks (including remarks directed to or about any cited reference) made in connection with the parent application (Serial No. 09/182,999), or in connection with any related application. The Applicants do not intend any prior claim amendment or remark in the parent application or any related application to have any effect on the prosecution or scope of any claim in the present application.

No new matter has been added.

The Examiner is invited to telephone the undersigned if such would advance the prosecution of the Application.

Respectfully submitted,

Date 9/25/00

By Scott D. Anderson  
Scott D. Anderson  
Attorney for Applicants  
Registration No. 46,521

**FOLEY & LARDNER**  
Firstar Center  
777 East Wisconsin Avenue  
Milwaukee, Wisconsin 53202-5367  
Telephone: (414) 297-5740  
Telecopy: (414) 297-4900

## ABSTRACT

A mounting structure for at least one display board providing a first mounting interface and a second mounting interface is disclosed. The mounting structure includes a first pivotal interface and a second pivotal interface. The first pivotal interface includes a first projection forming a retaining slot adapted to engage the first mounting interface of the display board. The second pivotal interface is adapted to engage the second mounting interface of the display board. The display board is adapted to be removably pivotally coupled to the mounting structure at both the first pivotal interface and the second pivotal interface. A mounting structure for display of at least one display board is also disclosed. The mounting structure includes a frame, and a compliant retaining system. The compliant retaining system includes a pair of spaced-apart members for the display board coupled to the frame, wherein at least one of the members is compliant. The display board can be pressed into secure engagement between the members of the compliant retaining system. A mounting structure coupled to a floor and associated with an existing structure and for use with at least one display board is further disclosed. The mounting structure includes an articulating frame and at least one display rack. The frame is pivotally coupled to the existing structure for movement between a fully deployed position and a fully stowed position. The at least one display rack is coupled to the articulating frame and provides a first interface and a second interface for pivotal coupling of a plurality of display boards.

## DISPLAY BOARD SYSTEM

### FIELD OF THE INVENTION

The present invention relates to a display board system. The present invention more particularly relates to a display board system including display boards having a variety of surface treatments and providing a variety of mounting interfaces and associated mounting structures to facilitate the use and storage of the display boards.

### CROSS-REFERENCE TO RELATED APPLICATIONS

The following U.S. patent applications are cross-referenced and incorporated by reference herein: (a) Serial No. \_\_\_\_\_ (Attorney Docket No. 26167-562), titled "INFORMATION DISPLAY SYSTEM" and filed herewith; (b) Serial No. \_\_\_\_\_ (Attorney Docket No. 26167-563), titled "WORK STATION" and filed herewith; (c) Serial No. \_\_\_\_\_ (Attorney Docket No. 26167-564), titled "WORK ENVIRONMENT" and filed herewith; (d) Serial No. \_\_\_\_\_ (Attorney Docket No. 26167-568), titled "DISPLAY BOARD SYSTEM" and filed herewith; (e) Serial No. \_\_\_\_\_ (Attorney Docket No. 26167-569), titled "DISPLAY BOARD SYSTEM" and filed herewith.

### BACKGROUND OF THE INVENTION

It is well known to display information on surfaces, typically boards on which the information is contained. For example, information is displayed on billboards, signs, prints, posters, chalk boards, white boards, installed through mounting interfaces to mounting structures such as walls, racks, posts, stands, to name but a few known applications. In a general sense, such known applications very ably provide for the display of information. However, such known applications are typically characterized either by their relative permanence or by their relative impermanence because of the surfaces on which the information is contained. For example, the mounting interfaces and associated mounting structures holding or providing for the surfaces, are generally either too rigid

and inflexible, i.e. immobile and difficult to reconfigure or otherwise to use and store information, as in the case of information that is applied on a fixed wall, or too insubstantial, i.e. highly mobile but otherwise tending to put the information on display at risk of loss before it can be stored, as in the case of information that is posted on a vertical surface (e.g. a bulletin board). As a result, such known applications are generally not well suited for use in a dynamic work environment, where information is ideally created, displayed (shared and communicated) and stored in a highly efficient manner.

In an attempt to overcome the shortcomings of such known applications, the use of "display boards," discrete information-containing structures that are mounted within a work space or work environment, has proliferated. However, such known display boards have typically not been provided with mounting interfaces that facilitate the use and storage of the display boards in a manner that facilitates "information persistence" – with information on the display boards being made readily available when needed while conveniently stowed when not needed, for example, for a group project. Moreover, the surface treatments applied to such known display boards are generally limited; such known display boards have typically not been provided with a combination of useful surface treatments that allow information to be conveyed in a variety of media. Nor have such known display boards been provided with mounting interfaces and associated mounting structures in a system that facilitates the use and interchangeability of the display boards and the use, display and storage of information contained on the display boards.

Accordingly, it would be advantageous to have a display board system adapted to use, display and store information efficiently in a dynamic work environment. It would also be advantageous to have a display board system that includes display boards having surface treatments that facilitate the collection, transformation, use, display and storage of information in a wide variety of formats. It would further be advantageous to have a display board system providing display boards of a similar basic construction and format and a relatively low cost, yet readily adapted for use with a plurality of mounting interfaces. It would further be advantageous to have a plurality of mounting structures adapted to support and promote the use, display and storage of the display boards. It

would further be advantageous if the mounting structures were configured to allow the efficient use, display and storage of display boards so that information contained on the display boards could efficiently be used, displayed and stored by persons in a work environment to increase productivity, particularly in the performance of groups.

5

## SUMMARY OF THE INVENTION

The present invention relates to an apparatus for display of information in a work environment. The apparatus includes a display board with a substantially rigid core and defines a first side having a first surface and a second side opposite of the first side having a second surface. The first surface has a first surface treatment and the second surface has a second surface treatment. The first surface treatment includes a reusable adhesive and a clear film cover over the reusable adhesive.

10

The present invention further relates to an apparatus for display of information in a work environment. The apparatus includes a display board with a substantially rigid core and defining a first side having a first surface and a second side opposite of the first side having a second surface, the first surface having a first surface treatment and the second surface having a second surface treatment. The first surface treatment includes a reusable adhesive and the second surface treatment is a functional surface treatment.

15

The present invention further relates to an apparatus for display of information in a work environment. The apparatus includes a display board with a substantially rigid core and defining a first side having a first surface and a second side opposite of the first side having a second surface, the first surface having a first surface treatment and the second surface having a second surface treatment. The display board has a generally rectangular shape with a first set of corners each having a first multi-functional mounting interface and a second set of corners each having a second mounting interface.

20

25

The present invention further relates to a mounting structure for at least one display board providing a first mounting interface and a second mounting interface. The mounting structure includes a first pivotal interface adapted to engage the first mounting

interface of the display board and a second pivotal interface adapted to engage the second mounting interface of the display board so that the display board is removably pivotally mounted within the mounting structure.

The present invention further relates to a mounting structure for associating  
5 at least one display board providing a mounting interface with a panel wall having a top and a first side opposing a second side. The mounting structure includes a rail having a first end and a second end and at least one track for engagement with the mounting interface of the display board between the first end and the second end and an end fitting coupled to each of the first end of the rail and the second end of the rail. The mounting  
10 structure also includes a hook for placement over the top of the panel wall, a pivot post coupled to the hook and pivotally coupled to the end fitting, and a spring member coupled to the pivot post within the end fitting tending to draw the hook into contact with the first side of the panel wall and the end fitting into contact with the second side of the panel wall.

The present invention further relates to a mounting structure for display of at  
15 least one display board. The mounting structure includes a frame, a platform for the display board coupled to the frame, and a compliant retaining system for the display board coupled to the frame. The display board can be placed on the platform and pressed into secure engagement with the compliant retaining system.

The present invention further relates to an easel for use with at least one  
20 display board. The easel includes a base, a first frame section coupled to the base, a second frame section coupled to the base, a stowing area formed between the first frame section and second frame section, a first tray coupled to the first frame section, and a second tray coupled to the second frame section. A first display board can be placed on  
25 display on the first tray, a second display board can be placed on display on the second tray, and a plurality of display boards can be stored in the stowing area.

The present invention further relates to a mounting structure associated with  
an existing structure and for use with at least one display board. The mounting structure includes an articulating frame pivotally coupled to the existing structure for movement

between a fully deployed position and a fully stowed position. The mounting structure also includes at least one display rack coupled to the articulating frame and providing an interface for pivotal coupling of a plurality of display boards.

The present invention further relates to an easel having a base and a support  
5 frame adapted to provide for the display of display boards on a tray coupled to the support  
frame. The base of the easel has a nested portion and a nesting portion so that one easel  
can be nested within another easel.

The present invention further relates to an easel having a base and a support frame adapted to provide for the display of display boards on a tray coupled to the support frame. The easel includes pivotally coupling the base to the support frame and pivotally coupling the tray to the support frame.



## DESCRIPTION OF THE FIGURES

FIGURE 1 is a perspective view of a display board according to a preferred embodiment of the present invention.

FIGURE 2 is an exploded perspective view of the display board.

5 FIGURE 3 is a fragmentary exploded perspective view of the display board.

FIGURE 4 is a fragmentary exploded perspective view of a display board according to an alternative embodiment.

FIGURE 5 is a perspective view of a display board according to an alternative embodiment with a clear film overlay.

10 FIGURE 5A is a fragmentary perspective view of the display board of FIGURE 5 showing a detail of lifting tabs.

FIGURES 5B through 5D are fragmentary perspective view of the display board of FIGURE 5 showing a detail of lifting tabs according to an alternative embodiment.

15 FIGURE 5E is a sectional plan view of the display board of FIGURE 5 taken at line 5E-5E in FIGURE 5C.

FIGURE 6 is a perspective view of the construction of the display board of FIGURE 5.

20 FIGURE 6A is a fragmentary perspective view of a display board according to an alternative embodiment.

FIGURE 7 is a fragmentary partially exploded perspective view of the display board of FIGURE 1 showing a mounting arrangement.

FIGURE 8 is a fragmentary perspective view of the display board of FIGURE 1 showing a mounting arrangement.

25 FIGURES 9 and 10 are fragmentary perspective views of a display board according to an alternative embodiment showing a mounting arrangement.

FIGURE 11 is a fragmentary exploded perspective view of a display board according to an alternative embodiment showing a mounting arrangement.



FIGURE 12 is a sectional elevation view of the display board of FIGURES 9 through 11 taken at line 12-12 in FIGURE 9.

FIGURE 12A is a fragmentary sectional plan view of the display board taken at line 12A-12A in FIGURE 12.

5           FIGURE 13 is a fragmentary perspective view of a display board according to an alternative embodiment providing a universal corner member.

FIGURE 14 is a fragmentary perspective view of a display board system including a storage cup clip arrangement.

10           FIGURE 15 is a fragmentary exploded perspective view of a display board system including a coupling arrangement.

FIGURE 16 is a fragmentary exploded perspective view of a display board system including a label arrangement.

FIGURE 17 is an exploded perspective view of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

15           FIGURE 18 is a fragmentary exploded perspective view of the mounting structure of FIGURE 17 showing the installation of a display board.

FIGURES 19A and 19B are fragmentary exploded perspective views of the mounting structure of FIGURE 17 showing the installation of a display board.

20           FIGURE 20 is a perspective view of the mounting structure of FIGURE 17 wherein a plurality of display boards have been installed.

FIGURE 21 is a fragmentary exploded perspective view of the mounting structure of FIGURE 17 including a mounting arrangement according to an exemplary embodiment.

25           FIGURES 21A and 21B are fragmentary sectional plan views of the mounting arrangement of FIGURE 21 taken along line 21A-21A.

FIGURE 22 is a fragmentary exploded perspective view of the mounting structure of FIGURE 17 including a mounting arrangement according to an exemplary embodiment.



FIGURE 23 is a fragmentary exploded perspective view of the mounting structure of FIGURE 17 including a carrier.

FIGURE 23A is a fragmentary sectional elevation view of the mounting structure of FIGURE 23 taken along line 23A-23A.

5           FIGURE 23B is an exploded perspective view of a mounting structure for a display board system according to an alternative embodiment adapted to provide an interface for the display board of FIGURE 13.

FIGURE 23C is a fragmentary elevation view of the mounting structure of FIGURE 23B.

10           FIGURE 24 is a perspective view of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

FIGURES 25A through 25C are fragmentary perspective views of the mounting structure of FIGURE 24.

15           FIGURE 25D is a fragmentary sectional elevation view of the mounting structure of FIGURE 24 taken at line 25D-25D in FIGURE 26A.

FIGURE 26 is a fragmentary sectional elevation view of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

20           FIGURE 26A is a fragmentary exploded perspective view of the mounting structure of FIGURE 26.

FIGURE 27 is a fragmentary sectional elevation view of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

25           FIGURE 27A is a fragmentary exploded perspective view of the mounting structure of FIGURE 27.

FIGURE 28 is a perspective view of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

FIGURE 29 is a fragmentary exploded perspective view of the mounting structure of FIGURE 28.

FIGURE 30 is a side elevation view of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

FIGURE 31 is a perspective view of the mounting structure of FIGURE 30.

FIGURE 32 is a perspective view of a mounting structure of a display board system according to an exemplary embodiment of the present invention.

FIGURES 33A through 33C are perspective views of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

FIGURES 33D through 33F are side elevation views of the mounting structure of FIGURES 33A through 33C.

FIGURE 33G is a sectional elevation view of a board pad of the mounting structure taken at line 33G-33G in FIGURE 33A.

FIGURE 34A is a perspective view of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

FIGURE 34B is a fragmentary sectional perspective view of the mounting structure of FIGURE 34A taken along line 34B-34B.

FIGURES 34C through 34E are perspective elevation views of the mounting structure of FIGURE 34A.

FIGURE 35 is a perspective view of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

FIGURE 36 is an exploded perspective view of the mounting structure of FIGURE 35.

FIGURES 37A and 37B are fragmentary sectional elevation views of the mounting structure of FIGURE 35.

FIGURE 38 is a perspective view of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

FIGURE 39 is a fragmentary perspective view of the mounting structure of FIGURE 38 showing a mounting arrangement for a display board.

FIGURE 40 is a fragmentary perspective view of a mounting structure for a display board system showing a mounting arrangement for a display board according to an alternative embodiment of the present invention.

5 FIGURE 41 is an exploded perspective view of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

FIGURES 42 and 43 are top plan views of a mounting structure for a display board system according to an exemplary embodiment of the present invention.

FIGURE 44 is a fragmentary exploded perspective view of the mounting structure of FIGURES 42 and 43.

10 FIGURE 45 is a perspective view of the mounting structure of FIGURES 42 and 43.

FIG. 40  
FIG. 41  
FIG. 42  
FIG. 43  
FIG. 44  
FIG. 45

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGURES 1 and 2, a display board 100 is shown according to an exemplary embodiment of the present invention. Display board 100 includes side frame members shown as extruded edge trim members 102 and top and bottom frame members also shown as extruded edge trim members 104. Display board 100 four corner members 106 (top) and 108 (bottom) secured to side frame members 102 and top and bottom frame members 104. Display board 100 includes a rigid core 110 providing outer surfaces, namely a front surface 112 and a back surface (not visible).

According to any preferred embodiment, the display board is configured in a generally symmetrical basic form so that the designation of a “front surface” and “back surface” is essentially arbitrary and dependent upon the orientation of the display board with respect to a person intending to use the display board. As shown in the FIGURES, and as will be apparent to those who review this disclosure, the outer surfaces of the display boards may be provided with a wide variety of functional surface treatments (e.g. tackable adhesive, clear film overlay or “photo album”, clear film “pocket”, writable clear film, cork or tack board, peg board, magnetic board, marker board, dry erase or “white” board, paper or paper tablet, projection screen, etc.) or decorative surface treatments (e.g. graphics display, cloth, etc.) in a wide variety of combinations (i.e. with one surface differing in whole or in part from the other surface) that may be suited or adapted to a wide variety of functional and decorative purposes according to preferred and other alternative or exemplary embodiments of the present invention. According to any preferred embodiment, the display boards are configured for ease and flexibility of use (e.g. recording, mapping, transformation, capture, etc.), display (e.g. sharing and communicating), and storage (e.g. persistence) of information, as well as of mounting and removal from associated mounting structures.

As evident from FIGURES 3, 4 and 7, the rigid core of the display board may be formed of any of a variety of materials or have any of a variety of constructions. According to a preferred embodiment, as shown in FIGURES 1 through 3, rigid core 110 of display board 100 is formed of an internal honeycomb core structure 114 having an

external facing sheet 116. According to a particularly preferred embodiment, the honeycomb core structure with integrated facing sheet is of a type commercially available from Tenneco Packaging, Inc. of Lake Forest, Illinois. Surface 112 of display board 100 is attached to facing sheet 116 (for example, by a hot melt adhesive, or by other methods).

5 According to an alternative embodiment, as shown in FIGURE 4, rigid core 110 may be formed from an open honeycomb core structure 114 (i.e. similar to that shown in FIGURE 3 but without a external facing sheet) to which surface 112 is attached. According to another alternative embodiment, as shown in FIGURE 7, rigid core 110 may be formed from a solid or composite material or any other types of materials. According to any  
10 preferred embodiment, the rigid core (and associated frame members) will be of a construction that provides for a display board that is lightweight yet of sufficient structural integrity to suit its intended purposes (i.e. as may be defined by the particular surface treatment and associated mounting structures) and generally resistant to warping and bending. According to a particularly preferred embodiment, the edge trim members are  
15 made of a plastic material.

As is shown, side frame members 102 and top and bottom frame members 104 fit over and are secured to the edge of rigid core 110 (e.g. a press fit working with application of an adhesive). Corner members 106 and 108 each fit over and are joined to one of side frame members 102 and one of top or bottom frame members 104 to form a  
20 secure frame structure for display board 100. (According to a particularly preferred embodiment, the corner members and frame members are made of a plastic material and are joined by ultrasonic welding; according to alternative embodiments, the members can be joined or attached by adhesives or fastening arrangements.) As shown in FIGURE 7, each of frame members 102 and 104 provides a curved exterior but includes a generally  
25 orthogonal interior receptacle 128a shaped to receive and retain rigid core 110. The receptacle is formed between perimeter edges 126 of each frame member 102 and 104 and a pair of inwardly disposed transverse opposed ribs 128 (generally perpendicular to perimeter edges 126 and extending along the length of each frame member). Each corner member 106 (not shown) or 108 has a generally triangular profile (although other profiles

may be used according to alternative embodiments) with a curved exterior and includes an opening configured to receive a corresponding corner portion of rigid core 110 and curved exterior of each of two adjacent frame members 102 and 104. Opening includes a pair of inwardly disposed opposed fins 130 that extend along a central portion of opening between

5 a pair of opposed receptacles (each shaped to receive curved exterior of frame members 102 or 104). During assembly, the corner member is press fit onto the corresponding corner portion of the rigid core and over the two adjacent frame members. Corner member 108 spreads open at opposed fins 130 (slightly) while crossing frame members 102 and 104, then springs back to locate corner member 108 onto corner portion of rigid core

10 110. According to a particularly preferred embodiment, the corner members are able to withstand a “drop” without damage to the display board.

According to an exemplary embodiment of display board 100 shown in FIGURE 8, top corner member 106 includes an mounting element shown as an integral post-hook clip 140; bottom corner member 108 includes an aperture 152. Post-hook clip

15 140 includes a curved top cap 142 coupled to the top of corner member 106 by a web 146. Curved top cap 142 provides two opposed hooks 144. Post-hook clip 140 also includes a post 148 formed in web 146 (adjacent to a clearance slot 150). Bottom corner member 108 includes aperture 152 configured to fit on a pivot pin (not shown). As a result, a “multi-functional” mounting interface is provided and display board 100 is suited for both for

20 hanging (e.g. by the hook of the top corner member with the bottom corner member free of any engagement) and for pivotal mounting (e.g. through the post of the top corner member and the aperture of the bottom corner member); in addition, display board 100 is also suited for other forms of engagement or display.

Referring to FIGURES 9 through 12A, according to an alternative

25 embodiment, top corner member 106 includes a mounting element shown as a repositionable post-hook clip 160. As shown, repositionable post-hook clip 160 is of the same basic arrangement of integral post-hook clip 140, with curved top cap 162 providing hooks 164 and web 168 supporting top cap 162 and including post 168 and clearance slot 170. Repositionable post-hook clip 160 also includes a curved base cap 172 shaped to fit



over the top or side of corner member 106. Base cap 172 of post-hook clip 160 includes a pair of inwardly disposed opposed fins 174, each fin having a tab 176 at its leading edge so that when it is installed into corresponding horizontal groove 178a or vertical groove 178b, post-hook clip 160 is secured by a slot 180 at the terminal end of either of grooves 178a or 178b which engage tab 176 in a compliant (e.g. “snap”) fit (see FIGURE 12A). As a result, depending upon how the repositionable post-hook clip is installed (and the direction of mounting or engagement), the display board may be engaged either in a “landscape” mode or a “portrait” mode.

Referring to FIGURE 13, corner member 106 of display board 100 includes a “universal” integral mounting element 182 configured with a pair of caps 184 providing a set of hooks 186 both on the top and the side of corner member 106. Caps 184 also include a pair of opposed projections 188a and 188b both on the top and the side of corner member 106. Hooks 186 and projections 188a and 188b are configured for engagement with a mounting structure (not shown in FIGURE 13). According to any preferred embodiment, the universal integral mounting element allows both for hanging attachment (e.g. by the hooks, as shown in exemplary FIGURES 26 and 27) or pivotal engagement (e.g. by projections 188a and 188b, see, e.g., FIGURES 23B and 23C). The universal integral mounting element (e.g. providing a multi-functional mounting surface) also allows for attachment of the display board in either landscape mode or portrait mode.

As indicated, the surfaces of the display board may be provided with any of a wide variety of surface treatments, both functional and decorative, in a wide variety of combinations (i.e. one surface of a display board may have in whole or in part a different surface treatment than the other surface) and portions. According to any preferred embodiment, the surface treatment of the display boards will allow the display of one or more “layers” of information on each surface. In FIGURE 1, display board 100 includes a writable surface 112 (e.g. a Melamine paper dry-erase or other “white board” surface); the other surface of the display board may have a reusable adhesive (e.g. “tacky” or repositionable posting surface treatment). As shown in FIGURES 5 and 6, display board 100 includes with a clear film cover 120 (e.g. overlay) over a tackable surface 112b (e.g.

"photo album"). As shown, clear film cover 120 includes an upper sheet 122a and a lower sheet 122b; surface 112 (not shown in FIGURE 5) beneath clear film cover 120 is provided with a light adhesive (e.g. "tackable", "tacky" or "sticky") surface treatment so that both upper sheet 122a and lower sheet 122b of clear film cover 120 and sheets of paper or other materials (e.g. "paper capture" for display beneath the clear film cover) will removably adhere to surface 112 (upper sheet and lower sheet may lift off in any direction or one, or three or more sheets may be provided according to alternative embodiments). According to a particularly preferred embodiment, each sheet of the clear film cover is made of a material that is "writable" (either permanently or erasably, i.e. reusable for a number of cycles). As shown in FIGURES 5, 5A and 5B, each sheet of clear film cover 120 may include a lifting tab 124a (FIGURE 5A) that is of same material as the sheet or a lifting tab 124b (FIGURE 5B) that is of a different material or treatment than the sheet (e.g. a colored plastic flap that is more readily visible and non-adhesive). FIGURES 5C through 5E show a post 123 inserted into display board 100 that coacts with holes 123x to secure lifting tabs 124b (for upper sheet 122a and lower sheet 122b) to surface 112 of display board 100. Post 123 may be inserted on one side of the display board or (as shown in FIGURE 5E) may be provided in a two-headed post 125 that extends through core 110 of display board 100.

According to a particularly preferred embodiment, the clear film cover is a dry-erase polyester film sheet of a 0.007 inch thickness with acrylic hardcoat and 90 percent gloss level commercially available from Tekra Corporation of New Berlin, Wisconsin under the name MARNOT (TM). The tacky surfaces for the display boards according to particularly preferred embodiments are of a type similar to the POST-IT (TM) memoboard/bulletin board adhesive surface products commercially available from 3M Corporation of St. Paul, Minnesota; "tackiness" is reduced from the typical range of 75-125 grams to a range of approximately 20-50 grams when used with display boards providing the clear film cover. Preferably, tacky (or "tackable") surface treatments will provide at least 250 cycles of "stick on" and "peel off" use (whether with the clear film cover or directly with sheets of paper or other material). According to an alternative

embodiment shown in FIGURE 6A, surface 112 of display board 100 is provided with a series of "tacky" (e.g. reusable adhesive) sections 112x sized and selectively arranged to reduce lift off force while maintaining higher tackiness; "tacky" sections could be in various shapes or patterns, such as stripes.

5 According to preferred embodiments, the display boards are provided in a variety of sizes, though typically in a rectangular shape suitable for use and display of information in either portrait mode or landscape mode. Typical sizes would include 34 by 46 inches or a half-size 22 by 34 inches, though many other sizes are available according to alternative embodiments. According to any particularly preferred embodiment, the  
10 display boards are sized to correspond to the standard delivery format of the materials from which they are assembled (e.g. roll widths or sheet sizes of film material or adhesive surfaces, etc.). (The core of the display board may also be provided in a variety of widths.)

FIGURES 14 through 16 show exemplary embodiments of accessories for  
15 use with one or more display boards. FIGURE 14 shows a storage cup clip 190 including a cup-shaped receptacle 192 configured to contain markers 194 (shown in phantom lines) or the like. A clip portion 196 of storage cup clip 190 includes a pair of curved projections 198 shaped and sized to fit securely onto frame member 102 of display board 100. According to any preferred embodiment, the clip portion will be fit securely onto  
20 frame member (e.g. as to prevent undesired slipping or sliding along frame member when receptacle is loaded) but the curved projections will deform readily to allow both attachment and removal of the storage cup clip when desired. FIGURE 15 shows a utility clip 200. Utility clip 200 provides two clip portions 202 each having a pair of curved projections 204 connected by a central web 206. Clip portions 202 are shaped and sized to  
25 fit onto frame member 102 of a display board 100b. As shown, utility clip 200 can be used to attach adjacent display boards 100a and 100b by their adjacent frame members (e.g. providing a display board "interlock"); alternatively, the utility clip can be used to attach a marker to a display board. According to any preferred embodiment, the clip portions of the utility clip are configured to securely attach to the frame member of the

display board (or display boards) yet will readily allow for detachment. FIGURE 16 shows a label clip 210 formed from a pair of curved projections 212 coupled by a flat web 214. A label 216 (e.g. a paper slip or the like) can be slid into a slot 218 formed by grooves 219 in web 214 and is held in place against frame member 102 by spring tension.

5 As shown, label clip 210 fits securely (and removably) onto frame member 102 of display board 100 by spring tension and is made of a clear plastic material (e.g. styrene) so that label 216 is readily visible through flat web 214. According to any preferred embodiment, the clips are made of a compliant, spring-like material such as plastic, and will be provided with a mating profile, whether provided by projections or other engaging elements, that are  
10 suitably matched to the shape or construction of the corresponding frame or edge of the display boards to allow selectively for secure attachment and removal.

Referring to FIGURES 17 through 45, a variety of mounting structures for display boards are shown according to preferred and alternative embodiments of the present invention. The mounting structures are adapted to mount or stand the display  
15 boards on other structures, for example, floors, architectural walls, panel walls, systems furniture, other articles of furniture, etc. According to the preferred embodiments, the mounting structures are configured for display and use with (and storage of) the display boards shown and described in FIGURES 1 through 16. The variety of mounting structures that may be used with the display boards illustrates the flexibility and  
20 adaptability of display boards and their mounting interfaces. However, it is important to note that according to alternative embodiments that will be apparent to those who review this disclosure, the mounting structures can readily be adapted for use or interfacing (e.g. hanging, pivot mount, press fit, leaning, etc. in a variety of modes, such as landscape mode or portrait mode) with a wide variety of display boards having a wide variety of  
25 alternative sizes, shapes and constructions. It is also important to note generally that according to any preferred embodiment, the display board system is intended to promote and advance the efficient use, display and storage of information and layers of information on display boards (regardless of the format by which the information is placed on the display boards) through their mounting interfaces and associated mounting structures.

Referring specifically to FIGURE 17, a mounting structure is shown as a rack 220. Rack 220 provides a pivotal mounting interface for display boards 100 (e.g. in the manner of a flip book with ready visibility of both surfaces of display boards 100).

Rack 220 includes a center frame 222 and a cover 224; rack 220 also includes a cap 226

5 and a base 228 securing frame 222 and cover 224 into an integrated structure. Frame 222 includes two side walls 230 and a center wall 232. Side walls 230 of frame 222 each include a top mounting tab 234 and a bottom mounting tab 236, which project horizontally from an upper ledge 238 or lower ledge 240 at the top and bottom of frame 222, respectively. Each of side walls 230 of frame 222 also includes a vertical trim rail 242.

10 According to a particularly preferred embodiment, the center frame is integrally formed (e.g. folded) from sheet metal. Cover 224 includes a series of vertical corrugations 244 and has a vertical trim hook 246 within each lateral end forming a groove 248. Each vertical trim hook 246 of cover 224 is configured to engage corresponding vertical trim rail 242 of frame 222 (e.g. within groove 248), holding cover 224 onto frame 222. According to a

15 particularly preferred embodiment, the cover is formed from an extruded plastic material.

Base 228 includes a flat bottom 250 and a core 252 (above bottom) having rear and side walls 256 providing a profile configured to contain lower ledge 240 of center frame 222 and a front wall 258 providing a corrugated profile corresponding generally to corrugations 244 of cover 224 (slightly offset and larger). A horizontal ledge 260 including four

20 vertical pegs 262 (e.g. rounded posts) extends from front wall 258 of base 228. Each bottom mounting tab 236 of frame 222 fits within core 252 of base; threaded mounting holes 235 in each bottom mounting tab 236 of frame 222 correspond to mounting holes 264 in core 252 to allow base 228 to be secured to frame 222 with threaded fasteners 266. Cap 226 includes a flat top 268 and a core 270 (beneath top 268) having rear and side walls 272 providing a profile configured to contain upper ledge 238 of center frame 222 and a front wall 274 providing a corrugated profile corresponding generally to corrugations 244 of cover 224 (slightly offset and larger). A horizontal plate 276 extends from front wall 274 of cap 226; horizontal plate 276 includes four curved hooks 278 forming four retaining slots 280 (having a narrowing retaining profile as shown). Each top mounting tab 234 of

frame 222 fits within core 270 of cap 226; threaded mounting holes 235 in each top mounting tab 234 of frame 222 correspond to mounting holes 266a in core 270 to allow cap 226 to be secured to frame 222 with a threaded fastener 266 (or a thread forming fastener). According to a particularly preferred embodiment, the base and cap are formed from a plastic material.

According to any particularly preferred embodiment, the rack is adapted for mounting to a structure provided by a wall or other article (e.g. by any of a variety of conventional or other mounting arrangements). As shown in FIGURE 17, each side wall 230 of center frame 222 of rack 220 contains a mounting arrangement shown as a pattern of mounting holes 282 (e.g. upper and lower set of adjustment slots) through which fasteners (shown as screws 284) are used to secure rack 220 in corresponding mounting holes 286 in a vertical structure shown as an architectural wall 288. As shown in FIGURE 17, rack 220 is mounted into a corner 290 of architectural wall 288 and thus is mounted at each side wall 230 of frame 222. According to alternative embodiments, the rack can be mounted by one of its side walls against a single wall or structure providing a vertical frame, or by a wide variety of other mounting arrangements that will become apparent to those who review this disclosure; the pattern of mounting holes can be arranged to fit a wide variety of mounting structures, such as walls or frames.

Referring to FIGURES 18 through 20, the interface between the display board system and rack 220 is shown. As is evident from FIGURE 20, rack 220 provides a pivotal mounting interface for one or a plurality of display boards (four are shown as according to a particularly preferred embodiment, though according to alternative arrangements the mounting structure can provide for any number of display boards). In FIGURE 18, peg 262 of base 228 of rack 220 is shown being engaged through an aperture 152 in bottom corner member 108 of display board 100. Corrugations 244 in cover 224 of rack 220 provide a guide (visual and physical) to assist the installation of display boards (e.g. to "find" peg). In FIGURES 19A and 19B, hook 278 and corresponding retaining slot 280 of cap 226 of rack 220 is shown being engaged by post 148 of top corner member 106 of display board 100. In FIGURE 19A, post 148 is disengaged and at the relatively

wide opening of retaining slot 280; in FIGURE 19B, post 148 is engaged (e.g. "gripped") having been guided around hook 278, namely slid into and around the narrowing retaining profile of retaining slot 280, and into a secure, trapped (placement) fit at a terminus 280a of retaining slot 280 (e.g. terminus 280a has an inner diameter or profile slightly larger than an outer diameter of cylindrical post 148). The weight of the display board serves to retain the post in the terminus of the retaining slot in use (e.g. pivotal movement of the display board). According to alternative embodiments, the rack can be of a variety of sizes allowing for installation of a greater or lesser number of display boards (e.g. with more or less than four pegs and corresponding retaining slots).

FIGURES 21 and 22 show exemplary mounting arrangements for securing rack 220 to a panel wall system. As shown in FIGURE 21, panel wall 292 includes a horizontal slotted rail 294 including a repeating arrangement of slots 296 spaced apart by webs 298. A mounting bracket 300 is configured to mount rack 220 to panel wall 292. Mounting bracket 300 includes a base 302 (having a "L"-shaped profile with a top 304 and a side wall 306) and a spring clip 308 (also having a "L"-shaped profile with a top 310 and a side wall 312) that is joined to base 302 by welding or the like (e.g. two spot welds 314 are shown) so that the corresponding side walls are ordinarily maintained in facing contact under a holding or biasing force. A threaded rod 316 is joined to side wall 306 of base 302 and projects through an oversized aperture 318 in side wall 312 of spring clip 308. Top 304 of base 302 includes two hooks 320 each forming a retaining slot 322 separated by a gap 324; top 310 of spring clip 308 includes a tab 326 flanked by two flaps 328. Each hook 320 of base 302 of mounting bracket 300 is sized for insertion within slot 296 of horizontal slotted rail 294 of panel wall 292. As shown, a space 330 is formed between tab 326 and flap 328 of spring clip 308 within retaining slot 322 of hook 320 of base 302. Referring to FIGURE 21A, mounting bracket 300 is shown inserted into horizontal slotted rail 294 prior to engagement; hooks 320 have been inserted into slots 296 (not shown) of horizontal slotted rail 294 and tab 326 of spring clip 308 rests against web 298 of horizontal slotted rail 294 so that the corresponding side walls 306 and 312 of base 302 and spring clip 308 have temporarily been urged apart. Referring to FIGURE 21B, mounting

1  
bracket 300 has been securely engaged within horizontal slotted rail 294; the corresponding side walls of base 302 and spring clip 308 are in facing contact, and web 298 is retained within space 330 provided by mounting bracket 300. (Tab 326 thus secures mounting bracket 300 until spring clip 308 is separated (e.g. pried apart from base for

- 5 deinstallation.) With mounting bracket 300 engaged within horizontal slotted rail 294 at the designated mounting points (e.g. upper and lower), rack 220 is cantilevered from panel wall 292. As shown, mounting between mounting bracket 300 and rack 220 is effected through a corresponding aperture (shown as a mounting slot 282 in Figure 21) with a fastener (shown as a nut 332 in Figure 21 to be threaded onto threaded rod 316).

- 10 Referring to FIGURE 22, a mounting arrangement for securing rack 220 to a panel wall 334 having a vertical slotted rail 336 (providing a series of slots 338 spaced apart by webs 340) is shown. A mounting bracket 342 (of an "L"-shaped profile) has a base 344 and set of rearwardly projecting hooks 346 sized to fit into slots 338 and to engage webs 340 of vertical slotted rail 336; a pair of threaded rods 348 project forward
- 15 from base 344 of mounting bracket 342. With mounting bracket 342 engaged within vertical slotted rail 336 at the designated mounting points (e.g. upper and lower), rack 220 is cantilevered from panel wall 334. As shown, mounting between mounting bracket 342 and rack 220 is effected through a corresponding aperture pattern (shown as mounting slots 282) with a set of fasteners (shown as a pair of nuts 332 to be threaded onto each threaded
- 20 rod 348). According to a particularly preferred embodiment, the mounting bracket may include a spring clip or other locking member.

- Referring to FIGURES 23 and 23A, a storage tray 350 for a rack 220 is shown (along with a mounting interface). Storage tray 350 includes a horizontal floor 352 having a ledge or rim 354 and vertical walls (e.g. a back wall 356 and two side walls 358).
- 25 Each of the vertical walls of storage tray 350 includes a vertical peg 360 that can be securely press fit into a corresponding aperture 362 in the bottom of base 228 of rack 220. When storage tray 350 is installed onto base 228 of rack 220 tools (shown in phantom lines as a marker 194 and an eraser 195) can be stored or removed through a front opening 366 between rim 354 and the bottom 364 of base 228. According to an alternative embodiment



shown in FIGURES 23B and 23C, a modified rack 220a with cap 226a and base 228a providing apertures 189 from a web 191 accommodates the display board mounting interface shown in FIGURE 13.

Referring to FIGURES 24 through 27, a mounting structure is shown as a rail system according to exemplary embodiments. Referring to FIGURE 24, rail system 370 is adapted to provide a generally horizontal rail 372 (for hanging display boards 100 from a panel wall 374 or similar structure) having at each end a pivotal mounting interface shown as a self-adjusting hook assembly 376. Hook assembly 376 includes a hook 378 (formed from a horizontal cap 380 with a downwardly projecting peg 382) pivotally coupled to an end fitting 384 through a pivot post 386 (e.g. peg).

As shown in FIGURE 25C, rail 372 is pivotally coupled to hook assembly 376. FIGURE 25D shows the detail of the pivotal coupling of hook assembly 376 according to an exemplary embodiment. Pivot post 386 includes a double shoulder bolt 388 having an outer stage 390 and an inner stage 392 and fitted within an aperture 394 (e.g. collar) in end fitting. A torsion spring 398 is installed around and secured to outer stage of double shoulder bolt 388 at one end and secured within end fitting 396 at the other end. Inner stage 392 of double shoulder bolt 388 has a threaded end 402 and is secured within end fitting 400 by a locking nut 404 (with washer 406). An end cap 408 is fitted onto the base of end fitting 400 after inner stage 392 of double shoulder bolt 388 has been secured within end fitting 400 so as to allow pivotal movement of hook (not shown) with respect to end fitting 400 (through pivot post 386); torsion spring 398 is biased to tend to pivot the hook toward rail (e.g. pulling the peg into contact with the rail). According to the exemplary embodiments, hook assembly 376 is adapted to adjust to the width of the panel wall (or other structure) from which it is suspended (within a range defined by the reach or length of the hook). For example, hook assembly 376 is shown engaged with a relatively wide panel wall 374a in FIGURE 25A and with a relatively thin panel wall 374b in FIGURE 25B.

Referring to FIGURES 27 and 27A (and corresponding to FIGURES 25A through 25C), a single track rail 410 is shown with a corresponding hook assembly 376. Single

track rail 410 has a generally "L"-shaped profile with a vertical base portion 412 and a horizontal rail portion 414 (projecting to one side along base portion 412). Rail portion 414 has a single track 416 with a retaining rim 418 at its leading edge. Hook assembly 376 includes an end fitting 384 secured to each end of single track rail 410 by fasteners shown as screws 420 extending through apertures 422a in end fitting 384 and threaded into corresponding apertures 422 in base portion 412 of single track rail 410. To suspend display board 100 from rail 410, hook 144 of corner member 106 of display board 100 is engaged within corresponding track 416 of rail 410 (see, e.g., FIGURE 27). Referring to FIGURES 26 and 26A (and corresponding to FIGURE 25D), a dual track rail 424 is shown with a corresponding hook assembly 426. Dual track rail 424 has an inverted "T"-shaped profile with a vertical base portion 428 and two horizontal rail portions 430 each providing a track 432 with a retaining rim 434 at its leading edge. Hook assembly 376 includes an end fitting 400 secured to each end of dual track rail 424 by fasteners shown as screws 420 extending through apertures 422a in end fitting 400 and threaded into corresponding apertures 422 in base portion 428 of dual track rail 424. To suspend one display board 100 from rail 424 hook 144 of corner member 106 of display board 100 (one or more) is engaged within corresponding track 432 of dual track rail 424 (see, e.g., FIGURE 26).

Referring to FIGURES 28 through 31, a mounting structure is shown as a tray arrangement according to exemplary embodiments. As shown, tray 440 is configured for attachment to a mounting bracket 442 (which is mounted to a structure such as a wall 446 by a mounting screw 448) or to a mounting frame 444 (which is placed on a horizontal surface such as a shelf 450). Mounting bracket 442 is formed with a central mounting plate 452 having upper and lower tracks 454. Mounting frame 444 is a wire frame structure formed with upper and lower horizontal frame members 456 that span across right and left legs 458; legs 458 are of an "L"-shape each having a vertical frame member 460 and a horizontal support 462 (shown with cylindrical feet 464 installed). Tray 440 includes upper and lower arms 466, each having a groove 468 for engagement either with upper and lower tracks 454 of mounting bracket 442 or with upper and lower horizontal

frame members 456 of mounting frame 444. Upper and lower arms 466 of tray 440 support a horizontal platform 470 having an inner vertical rim 472 and an outer vertical rim 474. When tray 440 is installed onto mounting bracket 442 or mounting frame 444 its upper and lower arms 466 with platform 470 form a sturdy support structure for a display board 100 (which will lean against a vertical structure such as wall 446 or another article and will stand on inner vertical rim 472); platform 470 forms a support structure for tools (not shown) such as markers or the like between inner vertical rim 472 and outer vertical rim 474. (According to a particularly preferred embodiment, the support structure is made of an extruded plastic material.) Referring to FIGURES 30 and 31, tray 440 is mounted to wall 446 with mounting brackets 442 (preferably at least two). Support of display boards 100 (two are shown) is augmented by a pair of horizontally projecting grips 476 mounted to wall 446. Grips 476 include a compliant grip portion compliant retaining members shown as 478 and a mounting flange 480 (secured to wall 446 by a fastener shown as screw 482 threaded into wall 446). Grips 476 are mounted to wall 446 at a spacing that is essentially identical to the width of display board 100; when display board 100 is press fit between grips 476 a holding force is provided against frame members 102 of display board 100 by each contacted compliant grip portion 478 of grips 476 (which deform slightly). According to a particularly preferred embodiment, compliant grip portion 478 includes a series of deformable fins 484 and is made of an elastomeric material so that display board 100 is securely held but conveniently removed. The holding force provided by the grips may be adjusted by variations in the shape and profile of the grip portions (e.g. the thickness and spacing of the deformable fins, if fins are employed), as well as the material of construction, the spacing distance of mounting to the wall, etc. according to alternative embodiments.

Referring to FIGURE 32, a mounting structure is shown as a mat according to an exemplary embodiment. Mat 490 provides a top surface 492 having a series of vertically projecting guides 494 (shown as having varying heights) and a bottom surface 496 given a non-skid surface treatment (according to any conventional method). When mat 490 is installed on a horizontal surface such as a work surface or shelf 450 (as shown), it provides

at one or more of its projecting guides 494 a stand or support for the base of a display board 100 (shown in phantom lines) leaning against a vertical structure (shown in phantom lines as a wall). Other of the projecting guides may serve as holders for tool such as markers or the like. According to any particularly preferred embodiment, the mat is made  
5 of a rubber or plastic material.

Referring to FIGURES 33A through 40, a mounting structure is shown as an easel (e.g., stand or cart) according to exemplary embodiments. According to any preferred embodiments, each of the easels is formed from a welded steel tube structure, although other materials may be used according to alternative embodiments. A nesting easel 500 is  
10 shown in FIGURES 33A through 33G. Nesting easel 500 is a rigid structure having a pair of substantially upright rearwardly tilted side frame members 502 coupled to a curved back or handle member 504 and to a horizontal cross member 506 covered by a board pad 508. Side frame members 502 are coupled to a base 510. Base 510 has a pair of legs 512 coupled by a center portion 514 (providing base 510 with a tapering "V"/"U"-shaped  
15 profile) and a pair of substantially upright forwardly tilted support frame members 516. At the junction of each leg 512 and center portion 514 of base 510 a support pad 518 (e.g. of a compliant or elastomeric material) is provided; tapered center portion 514 of base 510 is raised to provide a capturing lip 520. A folding tray assembly 522 including a (plastic) tray 524 (of an "L"-shaped profile) is pivotally coupled across side frame members 502  
20 (e.g. by a bolt or other conventional pivotal mounting arrangement); tray assembly can be pivoted from a deployed position (shown in FIGURE 33A) to a stowed position (shown in FIGURE 33C). A display board 100 rests on tray 524 (with a retaining groove 523) and against board pad 508 for display (as shown in FIGURES 33B and 33D); an exposed portion of tray 524 is available for holding tools such as markers 194 and erasers 195.  
25 Display boards 100 not in use can be stored in base 510 of easel 500 (as shown in FIGURES 33B and 33D) resting on support pads 518 and against board pad 508; capturing lip 520 of base 510 will serve to keep leaning display boards 100 within base 510. As is shown in FIGURES 33C and 33F, after tray assembly 522 has been stowed, open front portion 526 of base 510 of one easel can be fitted onto tapered center portion 514 of base

510 of an adjacent easel so that one easel can be nested into the adjacent easel in a repeating pattern. According to a particularly preferred embodiment, as shown in FIGURE 33G, board pad, which is intended to prevent damage or marring of the display boards, is made of a neoprene wrap 528 fitted over cross member 506.

5 A folding easel 530 is shown in FIGURES 34A through 34E. Folding easel 530 is a rigid structure having a pair of substantially upright rearwardly tilted side frame members 532 coupled to an upper horizontal cross member 534 covered by a board pad 528 and a lower horizontal cross member 536. Side frame members 532 have a curved upper portion 538. A folding base 540 is pivotally coupled to side frame members 532. Folding base 10 540 includes a pair of support arms 542 and a center member 544 (e.g. folding base 540 has a "U"-shaped profile). Support arms 542 of folding base 540 include a projecting tab 546 for pivotal coupling to side frame member 532. At each curved upper portion 538 of side frame members 532 a compliant retaining system including a grip 548 (e.g. of a compliant or elastomeric material) having deformable fins 550 (e.g. ribs) is provided. At 15 each of upper exposed ends 552 of side frame members 532 a flexible flap 554 (e.g. of a compliant or elastomeric material) is provided (see FIGURE 34B) to form a holding area 556 for display boards 100 (shown in phantom lines). An upper folding tray assembly 558 (with a retaining groove 557) including a plastic tray 559a (of an "L"-shaped profile) is pivotally coupled across side frame members 532, as shown in FIGURE 34E, along with 20 folding base 540 through tabs 546. A lower folding tray assembly 560 including a plastic tray 559b (e.g. substantially identical to plastic tray 559a of upper folding tray assembly 558) is pivotally coupled across support arms 542 of folding base 540. According to any preferred embodiment, the pivotal couplings are effected by bolts or other conventional pivotal mounting arrangements. Upper and lower tray assemblies 558 and 560 can be 25 pivoted from a deployed position (shown in FIGURE 34A) to a stowed position (shown in FIGURE 34E). A display board 100 rests on upper tray 559a and against board pad 528 for display. As shown in FIGURE 34D, display board 100 is securely held between grips 548; an exposed portion of upper tray 559a is available for holding tools such as markers 194 and erasers 195. Display boards 100 not in use can be stored in holding area 556 of

easel 530 resting on lower tray 559b and against board pad 528 or against adjacent display boards (as shown in FIGURES 34C and 34D). Flexible flaps 554 will serve to keep leaning display boards within base 540. As is shown in FIGURES 34C, at least one of the display boards stored in holding area 556 is also visible from the rear of easel 530. When  
5 folding easel 530 is not in use, as shown in FIGURE 34E, upper and lower tray assemblies 558 and 560 can be stowed and folding base 540 can be folded onto to side frame members 532, forming a compact structure.

An adjustable easel 570 is shown in FIGURES 35 through 37B. Easel 570 is a rigid structure having a pair of substantially upright rearwardly tilted side frame members  
10 572 coupled to a curved back or handle member 574 and to a horizontal cross member 576 covered by a board pad 578. Side frame members 572 are coupled to a base 580. Base 580 has a pair of legs 582 coupled by a center portion 584 (providing base 580 with a tapering “U”-shaped profile). A tray support plate 586 is coupled across side frame members 572. Plate 586 includes at each lateral side a track 588 and a pattern of  
15 adjustment slots 590. An adjustable tray assembly 592 including a base frame 594 having an arm 596, from which extends a horizontal tray 598, is adjustably mounted to plate 586 across side frame members 572. Base frame 594 of tray assembly 592 includes at each lateral side a guide block 600 which fits within corresponding track 588 of plate 586 to allow for guided vertical movement of tray assembly 592 with respect to plate 586. Base  
20 frame 594 of tray assembly 592 also includes at each lateral side a locking member formed as a releasable tab 602 (e.g. a “finger release”). Each locking member 602 includes a rearward projection 604 that is biased into a position that will engage any adjacent corresponding adjustment slot 590 of plate 586 as tray assembly 592 is guided vertically within track 588 of plate 586. When projection 604 is engaged in any corresponding  
25 adjustment slot 590, tray assembly 592 is retained in the corresponding vertical position with respect to plate 586 (see FIGURE 37B). Each locking member also includes a release lever 606; lifting of release lever 606 disengages projection 604 from adjustment slot 590 and frees tray assembly 592 for vertical movement with respect to plate 586 (see phantom line disclosure in FIGURE 37A). Vertical adjustment of the position of tray assembly 592

with respect to plate 586 is therefore defined by the pattern of adjustment slots within plate 586, each adjustment slot providing a discrete vertical position for tray assembly. A display board 100 (shown in phantom lines in both landscape and portrait mode in FIGURE 35) rests on arm 596 of tray assembly 592 and against board pad 578 for display or use. Tray 598 which includes a base depression 608 is available for holding tools such as markers and erasers (not shown). According to any particularly preferred embodiment, the easel is made of a welded steel structure and the tray assembly is formed from a plastic material.

A mobile easel 610 is shown in FIGURES 38 and 39. Mobile easel 610 is a generally rigid and symmetrical structure including a generally rectangular base frame 612 having relatively short horizontal side cross members 614 (one is visible in FIGURE 38) and relatively long horizontal front (or lower) cross members 616 (one is visible in FIGURE 38). Base frame 612 also includes four curved legs 618 (three are visible in FIGURE 38) and two sets of generally vertical support frame members 620 (three are visible in FIGURE 38). Each set of support frame members 620 is coupled by a horizontal upper cross member 622 (parallel to a corresponding lower cross member 616 of base frame 612). Each support frame member has a curved upper portion 624. At each curved upper portion 624 of support frame members 620 a compliant retaining system (or compliant member) shown as a grip 626 (e.g. of a compliant or elastomeric material) having deformable fins (or ribs) 628 is provided. A horizontal tray assembly 630 (with a retaining groove 631) is installed across each set of support frame members 620 at a location between upper cross member 622 and lower cross member 616. A folded panel 632 (e.g. a sheet metal panel folded into a rectilinear "U"-shaped profile) is mounted between base frame 612 and each set of support frame members 620 (below each tray assembly 630) to form a stowing area 634 for display boards 100 between each set of support frame members 620. A display board 100 may rest on each tray assembly 630 and upper cross member 622 (which may be covered with a board pad) for display or use. As shown in FIGURES 38 and 39, display board 100 is securely held between grips 626; an exposed portion of each tray assembly 630 is available for holding tools such as markers

194 and erasers 195 (not shown). Stowing area 634 is provided with a floor 636 and walls 638 (by panel 632) for secure storage of display boards 100 that are not in use. However, stowing area 634 also has open ends 640 and an open top 642 to allow insertion and removal of display boards 100 in an accessible and convenient fashion. Mobile easel 610 includes rotatable wheels 644 on each of four curved legs 618, installed by known and conventional arrangements according to any preferred embodiment (e.g. with either all four wheels free to turn or with two straight wheels, etc.).

FIGURES 39 and 40 show arrangements for the compliant retaining system according to exemplary embodiments. As shown in FIGURE 39, curved grip 626 installed on upper curved portion 624 of support frame member 620 (e.g. rail) of the easel includes fins 628 (e.g. ribs) that deform when a display board 100 is press fit into display on the easel (to a shape and extent determined by the position of the display board within the grip) to secure display board 100 to the easel for working and use (e.g. display, writing, erasing, configuring, transport with a mobile easel, etc.). As shown in FIGURE 40, according to an alternative embodiment, a grip peg 646 is installed at the interference of vertical support frame member 620a and horizontal upper cross member 622a and horizontal cross member 622 of the mounting structure (e.g. easel). Grip peg 646 also includes fins 648 (e.g. projections, ribs or fingers, etc.) that deform to secure a display board 100 (shown in phantom lines) to the easel for use; as is evident, fins 648 are thicker than shown in FIGURE 39. As will become apparent to those who review this disclosure, a wide variety of compliant materials may be used for the grips, which according to alternative embodiments may be in a variety of shapes and may or may not include deformable fins (e.g. projections, ribs). According to the preferred embodiments, the grips are made of a compliant material that is soft and durable and can be formed by molding, such as an elastomer or plastic. According to any particularly preferred embodiment, the grips include a series of deformable fins and are formed from an elastic material so that each display boards is securely held but may conveniently be removed without damage or marring. The holding force and stiffness provided by the grips may be adjusted by variations in the shape and profile of the grips (e.g. the thickness and spacing



of the deformable fins, if fins are employed), as well as the material of construction, location of the grips, orientation of the grips, the spacing distance of the grips, or number of grips (e.g. one or more), etc., according to alternative embodiments.

Referring to FIGURE 41, a mounting structure is shown as a stand 650 according to an exemplary embodiment. Stand 650 is formed as a unitary structure and is of a generally symmetrical shape. Stand 650 includes a slot 652 for holding a display board 100 and four legs 654 arranged to provide a relatively stable base for display of display board 100. According to a particularly preferred embodiment, the stand is formed from a molded plastic material (e.g. blow molded). As shown, stand 650 has a shape that allows for stacking of one or more additional stands on top of each other.

Referring to FIGURES 42 through 45, a mounting structure is shown as an articulating frame system according to exemplary embodiments. As shown in FIGURES 42 through 45, the articulating frame system can be configured to include a rack of a type shown in FIGURE 17 to allow for display and use of display boards. (According to alternative embodiments, display boards may interface with the articulating frame system by any of a wide variety of other mounting structures and methods, including those shown in other FIGURES.) Referring to FIGURE 44, an articulating frame 670 includes a pair of vertical frame members 672 and 674 coupled by a horizontal upper cross member 676, a horizontal intermediate cross member 678, and a horizontal lower cross member 680 (e.g. each member preferably being a rectangular steel tube welded to form the structure). A base panel 682 or cladding is fastened (e.g. by threaded fasteners 684) to intermediate and lower cross members 678 and 680. Vertical frame member 672 is provided with a pair of hinge blocks 684 (upper) and 686 (lower), each configured to receive a hinge pin 688 (upper) and 690 (lower). Upper hinge pin 688 is secured to a wall 692 (or other structure) by a mounting bracket 694; lower hinge pin is secured to (or stands on) a floor 696 on a circular foot 698; upper and lower hinge pins share a pivotal axis 700. Vertical frame member 674 includes a wheel assembly 702 at its base. Wheel assembly 702 includes a frame 704 and an axle 706 retaining a wheel 708 for rotation; wheel assembly 702 is mounted to base of vertical frame member 674 by threaded fasteners 710 (e.g. screws). A

rack 220 is mounted to vertical frame member 674 (and alternatively also to vertical frame member 672) so that display boards can be installed for use and display. Two handles 712 are also mounted to vertical frame member 674. Articulating frame 670 is configured for pivotal movement (e.g. with respect to wall 692 or another structure) about axis 700

5 rolling along wheel 708 in a range of motion between a fully stowed position and a fully deployed position. Referring to FIGURES 42, 43 and 45, an articulating frame system 720 including two articulating frames 722 and 724 is shown. Each articulating frame 722 and 724 includes two racks 220a and 220b. Each of racks 220a and 220b includes four display boards 100. In FIGURE 42, each articulating frame 722 and 724 is stowed, but  
10 display boards 100 are deployed. In FIGURE 43, each articulating frame 722 and 724 is deployed, but display boards 100 are stowed. In FIGURE 45, each articulating frame 722 and 724 is stowed in a space frame 726 (shown in phantom lines), but certain display boards 100a and 100b are partially deployed. As will become evident to those who review this disclosure, a wide variety of configurations are possible for the articulating frame  
15 system, employing variations of size, shape, orientation, arrangement, mounting structures, etc., as well as variations in the deployment of display boards.

\* \* \*

It is important to note that the use of the term “display board” is not meant  
20 as a term of limitation, insofar as any “board” or like structure having a decorative or functional use or application is intended to be within the scope of the term. The use of the term “display board” is intended as a convenient reference for any such “board” or structure, which may also be viewed synonymously with the term “work board” or other like terms. It is also important to note that the use of the term “information” is meant to  
25 cover any use of any type of media that can be associated with a display board (or work board).

\* \* \*

Although only a few exemplary embodiments of the present invention have been described in detail in this disclosure, those skilled in the art who review this disclosure will readily appreciate that many modifications are possible in the exemplary embodiments (such as variations in sizes, structures, shapes and proportions of the various elements, values of parameters, mounting arrangements, or use of materials) without materially departing from the novel teachings and advantages of the invention. Accordingly, all such modifications are intended to be included within the scope of the invention as defined in the appended claims. Other substitutions, modifications, changes and omissions may be made in the design, operating conditions and arrangement of the preferred embodiments without departing from the spirit of the invention as expressed in the appended claims.

FIG. 1  
FIG. 2  
FIG. 3  
FIG. 4  
FIG. 5  
FIG. 6  
FIG. 7  
FIG. 8  
FIG. 9  
FIG. 10  
FIG. 11  
FIG. 12  
FIG. 13  
FIG. 14  
FIG. 15  
FIG. 16  
FIG. 17  
FIG. 18  
FIG. 19  
FIG. 20  
FIG. 21  
FIG. 22  
FIG. 23  
FIG. 24  
FIG. 25  
FIG. 26  
FIG. 27  
FIG. 28  
FIG. 29  
FIG. 30  
FIG. 31  
FIG. 32  
FIG. 33  
FIG. 34  
FIG. 35  
FIG. 36  
FIG. 37  
FIG. 38  
FIG. 39  
FIG. 40  
FIG. 41  
FIG. 42  
FIG. 43  
FIG. 44  
FIG. 45  
FIG. 46  
FIG. 47  
FIG. 48  
FIG. 49  
FIG. 50  
FIG. 51  
FIG. 52  
FIG. 53  
FIG. 54  
FIG. 55  
FIG. 56  
FIG. 57  
FIG. 58  
FIG. 59  
FIG. 60  
FIG. 61  
FIG. 62  
FIG. 63  
FIG. 64  
FIG. 65  
FIG. 66  
FIG. 67  
FIG. 68  
FIG. 69  
FIG. 70  
FIG. 71  
FIG. 72  
FIG. 73  
FIG. 74  
FIG. 75  
FIG. 76  
FIG. 77  
FIG. 78  
FIG. 79  
FIG. 80  
FIG. 81  
FIG. 82  
FIG. 83  
FIG. 84  
FIG. 85  
FIG. 86  
FIG. 87  
FIG. 88  
FIG. 89  
FIG. 90  
FIG. 91  
FIG. 92  
FIG. 93  
FIG. 94  
FIG. 95  
FIG. 96  
FIG. 97  
FIG. 98  
FIG. 99  
FIG. 100  
FIG. 101  
FIG. 102  
FIG. 103  
FIG. 104  
FIG. 105  
FIG. 106  
FIG. 107  
FIG. 108  
FIG. 109  
FIG. 110  
FIG. 111  
FIG. 112  
FIG. 113  
FIG. 114  
FIG. 115  
FIG. 116  
FIG. 117  
FIG. 118  
FIG. 119  
FIG. 120  
FIG. 121  
FIG. 122  
FIG. 123  
FIG. 124  
FIG. 125  
FIG. 126  
FIG. 127  
FIG. 128  
FIG. 129  
FIG. 130  
FIG. 131  
FIG. 132  
FIG. 133  
FIG. 134  
FIG. 135  
FIG. 136  
FIG. 137  
FIG. 138  
FIG. 139  
FIG. 140  
FIG. 141  
FIG. 142  
FIG. 143  
FIG. 144  
FIG. 145  
FIG. 146  
FIG. 147  
FIG. 148  
FIG. 149  
FIG. 150  
FIG. 151  
FIG. 152  
FIG. 153  
FIG. 154  
FIG. 155  
FIG. 156  
FIG. 157  
FIG. 158  
FIG. 159  
FIG. 160  
FIG. 161  
FIG. 162  
FIG. 163  
FIG. 164  
FIG. 165  
FIG. 166  
FIG. 167  
FIG. 168  
FIG. 169  
FIG. 170  
FIG. 171  
FIG. 172  
FIG. 173  
FIG. 174  
FIG. 175  
FIG. 176  
FIG. 177  
FIG. 178  
FIG. 179  
FIG. 180  
FIG. 181  
FIG. 182  
FIG. 183  
FIG. 184  
FIG. 185  
FIG. 186  
FIG. 187  
FIG. 188  
FIG. 189  
FIG. 190  
FIG. 191  
FIG. 192  
FIG. 193  
FIG. 194  
FIG. 195  
FIG. 196  
FIG. 197  
FIG. 198  
FIG. 199  
FIG. 200  
FIG. 201  
FIG. 202  
FIG. 203  
FIG. 204  
FIG. 205  
FIG. 206  
FIG. 207  
FIG. 208  
FIG. 209  
FIG. 210  
FIG. 211  
FIG. 212  
FIG. 213  
FIG. 214  
FIG. 215  
FIG. 216  
FIG. 217  
FIG. 218  
FIG. 219  
FIG. 220  
FIG. 221  
FIG. 222  
FIG. 223  
FIG. 224  
FIG. 225  
FIG. 226  
FIG. 227  
FIG. 228  
FIG. 229  
FIG. 230  
FIG. 231  
FIG. 232  
FIG. 233  
FIG. 234  
FIG. 235  
FIG. 236  
FIG. 237  
FIG. 238  
FIG. 239  
FIG. 240  
FIG. 241  
FIG. 242  
FIG. 243  
FIG. 244  
FIG. 245  
FIG. 246  
FIG. 247  
FIG. 248  
FIG. 249  
FIG. 250  
FIG. 251  
FIG. 252  
FIG. 253  
FIG. 254  
FIG. 255  
FIG. 256  
FIG. 257  
FIG. 258  
FIG. 259  
FIG. 260  
FIG. 261  
FIG. 262  
FIG. 263  
FIG. 264  
FIG. 265  
FIG. 266  
FIG. 267  
FIG. 268  
FIG. 269  
FIG. 270  
FIG. 271  
FIG. 272  
FIG. 273  
FIG. 274  
FIG. 275  
FIG. 276  
FIG. 277  
FIG. 278  
FIG. 279  
FIG. 280  
FIG. 281  
FIG. 282  
FIG. 283  
FIG. 284  
FIG. 285  
FIG. 286  
FIG. 287  
FIG. 288  
FIG. 289  
FIG. 290  
FIG. 291  
FIG. 292  
FIG. 293  
FIG. 294  
FIG. 295  
FIG. 296  
FIG. 297  
FIG. 298  
FIG. 299  
FIG. 300  
FIG. 301  
FIG. 302  
FIG. 303  
FIG. 304  
FIG. 305  
FIG. 306  
FIG. 307  
FIG. 308  
FIG. 309  
FIG. 310  
FIG. 311  
FIG. 312  
FIG. 313  
FIG. 314  
FIG. 315  
FIG. 316  
FIG. 317  
FIG. 318  
FIG. 319  
FIG. 320  
FIG. 321  
FIG. 322  
FIG. 323  
FIG. 324  
FIG. 325  
FIG. 326  
FIG. 327  
FIG. 328  
FIG. 329  
FIG. 330  
FIG. 331  
FIG. 332  
FIG. 333  
FIG. 334  
FIG. 335  
FIG. 336  
FIG. 337  
FIG. 338  
FIG. 339  
FIG. 340  
FIG. 341  
FIG. 342  
FIG. 343  
FIG. 344  
FIG. 345  
FIG. 346  
FIG. 347  
FIG. 348  
FIG. 349  
FIG. 350  
FIG. 351  
FIG. 352  
FIG. 353  
FIG. 354  
FIG. 355  
FIG. 356  
FIG. 357  
FIG. 358  
FIG. 359  
FIG. 360  
FIG. 361  
FIG. 362  
FIG. 363  
FIG. 364  
FIG. 365  
FIG. 366  
FIG. 367  
FIG. 368  
FIG. 369  
FIG. 370  
FIG. 371  
FIG. 372  
FIG. 373  
FIG. 374  
FIG. 375  
FIG. 376  
FIG. 377  
FIG. 378  
FIG. 379  
FIG. 380  
FIG. 381  
FIG. 382  
FIG. 383  
FIG. 384  
FIG. 385  
FIG. 386  
FIG. 387  
FIG. 388  
FIG. 389  
FIG. 390  
FIG. 391  
FIG. 392  
FIG. 393  
FIG. 394  
FIG. 395  
FIG. 396  
FIG. 397  
FIG. 398  
FIG. 399  
FIG. 400  
FIG. 401  
FIG. 402  
FIG. 403  
FIG. 404  
FIG. 405  
FIG. 406  
FIG. 407  
FIG. 408  
FIG. 409  
FIG. 410  
FIG. 411  
FIG. 412  
FIG. 413  
FIG. 414  
FIG. 415  
FIG. 416  
FIG. 417  
FIG. 418  
FIG. 419  
FIG. 420  
FIG. 421  
FIG. 422  
FIG. 423  
FIG. 424  
FIG. 425  
FIG. 426  
FIG. 427  
FIG. 428  
FIG. 429  
FIG. 430  
FIG. 431  
FIG. 432  
FIG. 433  
FIG. 434  
FIG. 435  
FIG. 436  
FIG. 437  
FIG. 438  
FIG. 439  
FIG. 440  
FIG. 441  
FIG. 442  
FIG. 443  
FIG. 444  
FIG. 445  
FIG. 446  
FIG. 447  
FIG. 448  
FIG. 449  
FIG. 450  
FIG. 451  
FIG. 452  
FIG. 453  
FIG. 454  
FIG. 455  
FIG. 456  
FIG. 457  
FIG. 458  
FIG. 459  
FIG. 460  
FIG. 461  
FIG. 462  
FIG. 463  
FIG. 464  
FIG. 465  
FIG. 466  
FIG. 467  
FIG. 468  
FIG. 469  
FIG. 470  
FIG. 471  
FIG. 472  
FIG. 473  
FIG. 474  
FIG. 475  
FIG. 476  
FIG. 477  
FIG. 478  
FIG. 479  
FIG. 480  
FIG. 481  
FIG. 482  
FIG. 483  
FIG. 484  
FIG. 485  
FIG. 486  
FIG. 487  
FIG. 488  
FIG. 489  
FIG. 490  
FIG. 491  
FIG. 492  
FIG. 493  
FIG. 494  
FIG. 495  
FIG. 496  
FIG. 497  
FIG. 498  
FIG. 499  
FIG. 500  
FIG. 501  
FIG. 502  
FIG. 503  
FIG. 504  
FIG. 505  
FIG. 506  
FIG. 507  
FIG. 508  
FIG. 509  
FIG. 510  
FIG. 511  
FIG. 512  
FIG. 513  
FIG. 514  
FIG. 515  
FIG. 516  
FIG. 517  
FIG. 518  
FIG. 519  
FIG. 520  
FIG. 521  
FIG. 522  
FIG. 523  
FIG. 524  
FIG. 525  
FIG. 526  
FIG. 527  
FIG. 528  
FIG. 529  
FIG. 530  
FIG. 531  
FIG. 532  
FIG. 533  
FIG. 534  
FIG. 535  
FIG. 536  
FIG. 537  
FIG. 538  
FIG. 539  
FIG. 540  
FIG. 541  
FIG. 542  
FIG. 543  
FIG. 544  
FIG. 545  
FIG. 546  
FIG. 547  
FIG. 548  
FIG. 549  
FIG. 550  
FIG. 551  
FIG. 552  
FIG. 553  
FIG. 554  
FIG. 555  
FIG. 556  
FIG. 557  
FIG. 558  
FIG. 559  
FIG. 560  
FIG. 561  
FIG. 562  
FIG. 563  
FIG. 564  
FIG. 565  
FIG. 566  
FIG. 567  
FIG. 568  
FIG. 569  
FIG. 570  
FIG. 571  
FIG. 572  
FIG. 573  
FIG. 574  
FIG. 575  
FIG. 576  
FIG. 577  
FIG. 578  
FIG. 579  
FIG. 580  
FIG. 581  
FIG. 582  
FIG. 583  
FIG. 584  
FIG. 585  
FIG. 586  
FIG. 587  
FIG. 588  
FIG. 589  
FIG. 590  
FIG. 591  
FIG. 592  
FIG. 593  
FIG. 594  
FIG. 595  
FIG. 596  
FIG. 597  
FIG. 598  
FIG. 599  
FIG. 600  
FIG. 601  
FIG. 602  
FIG. 603  
FIG. 604  
FIG. 605  
FIG. 606  
FIG. 607  
FIG. 608  
FIG. 609  
FIG. 610  
FIG. 611  
FIG. 612  
FIG. 613  
FIG. 614  
FIG. 615  
FIG. 616  
FIG. 617  
FIG. 618  
FIG. 619  
FIG. 620  
FIG. 621  
FIG. 622  
FIG. 623  
FIG. 624  
FIG. 625  
FIG. 626  
FIG. 627  
FIG. 628  
FIG. 629  
FIG. 630  
FIG. 631  
FIG. 632  
FIG. 633  
FIG. 634  
FIG. 635  
FIG. 636  
FIG. 637  
FIG. 638  
FIG. 639  
FIG. 640  
FIG. 641  
FIG. 642  
FIG. 643  
FIG. 644  
FIG. 645  
FIG. 646  
FIG. 647  
FIG. 648  
FIG. 649  
FIG. 650  
FIG. 651  
FIG. 652  
FIG. 653  
FIG. 654  
FIG. 655  
FIG. 656  
FIG. 657  
FIG. 658  
FIG. 659  
FIG. 660  
FIG. 661  
FIG. 662  
FIG. 663  
FIG. 664  
FIG. 665  
FIG. 666  
FIG. 667  
FIG. 668  
FIG. 669  
FIG. 670  
FIG. 671  
FIG. 672  
FIG. 673  
FIG. 674  
FIG. 675  
FIG. 676  
FIG. 677  
FIG. 678  
FIG. 679  
FIG. 680  
FIG. 681  
FIG. 682  
FIG. 683  
FIG. 684  
FIG. 685  
FIG. 686  
FIG. 687  
FIG. 688  
FIG. 689  
FIG. 690  
FIG. 691  
FIG. 692  
FIG. 693  
FIG. 694  
FIG. 695  
FIG. 696  
FIG. 697  
FIG. 698  
FIG. 699  
FIG. 700  
FIG. 701  
FIG. 702  
FIG. 703  
FIG. 704  
FIG. 705  
FIG. 706  
FIG. 707  
FIG. 708  
FIG. 709  
FIG. 710  
FIG. 711  
FIG. 712  
FIG. 713  
FIG. 714  
FIG. 715  
FIG. 716  
FIG. 717  
FIG. 718  
FIG. 719  
FIG. 720  
FIG. 721  
FIG. 722  
FIG. 723  
FIG. 724  
FIG. 725  
FIG. 726  
FIG. 727  
FIG. 728  
FIG. 729  
FIG. 730  
FIG. 731  
FIG. 732  
FIG. 733  
FIG. 734  
FIG. 735  
FIG. 736  
FIG. 737  
FIG. 738  
FIG. 739  
FIG. 740  
FIG. 741  
FIG. 742  
FIG. 743  
FIG. 744  
FIG. 745  
FIG. 746  
FIG. 747  
FIG. 748  
FIG. 749  
FIG. 750  
FIG. 751  
FIG. 752  
FIG. 753  
FIG. 754  
FIG. 755  
FIG. 756  
FIG. 757  
FIG. 758  
FIG. 759  
FIG. 760  
FIG. 761  
FIG. 762  
FIG. 763  
FIG. 764  
FIG. 765  
FIG. 766  
FIG. 767  
FIG. 768  
FIG. 769  
FIG. 770  
FIG. 771  
FIG. 772  
FIG. 773  
FIG. 774  
FIG. 775  
FIG. 776  
FIG. 777  
FIG. 778  
FIG. 779  
FIG. 780  
FIG. 781  
FIG. 782  
FIG. 783  
FIG. 784  
FIG. 785  
FIG. 786  
FIG. 787  
FIG. 788  
FIG. 789  
FIG. 790  
FIG. 791  
FIG. 792  
FIG. 793  
FIG. 794  
FIG. 795  
FIG. 796  
FIG. 797  
FIG. 798  
FIG. 799  
FIG. 800  
FIG. 801  
FIG. 802  
FIG. 803  
FIG. 804  
FIG. 805  
FIG. 806  
FIG. 807  
FIG. 808  
FIG. 809  
FIG. 810  
FIG. 811  
FIG. 812  
FIG. 813  
FIG. 814  
FIG. 815  
FIG. 816  
FIG. 817  
FIG. 818  
FIG. 819  
FIG. 820  
FIG. 821  
FIG. 822  
FIG. 823  
FIG. 824  
FIG. 825  
FIG. 826  
FIG. 827  
FIG. 828  
FIG. 829  
FIG. 830  
FIG. 831  
FIG. 832  
FIG. 833  
FIG. 834  
FIG. 835  
FIG. 836  
FIG. 837  
FIG. 838  
FIG. 839  
FIG. 840  
FIG. 841  
FIG. 842  
FIG. 843  
FIG. 844  
FIG. 845  
FIG. 846  
FIG. 847  
FIG. 848  
FIG. 849  
FIG. 850  
FIG. 851  
FIG. 852  
FIG. 853  
FIG. 854  
FIG. 855  
FIG. 856  
FIG. 857  
FIG. 858  
FIG. 859  
FIG. 860  
FIG. 861  
FIG. 862  
FIG. 863  
FIG. 864  
FIG. 865  
FIG. 866  
FIG. 867  
FIG. 868  
FIG. 869  
FIG. 870  
FIG. 871  
FIG. 872  
FIG. 873  
FIG. 874  
FIG. 875  
FIG. 876  
FIG. 877  
FIG. 878  
FIG. 879  
FIG. 880  
FIG. 881  
FIG. 882  
FIG. 883  
FIG. 884  
FIG. 885  
FIG. 886  
FIG. 887  
FIG. 888  
FIG. 889  
FIG. 890  
FIG. 891  
FIG. 892  
FIG. 893  
FIG. 894  
FIG. 895  
FIG. 896  
FIG. 897  
FIG. 898  
FIG. 899  
FIG. 900  
FIG. 901  
FIG. 902  
FIG. 903  
FIG. 904  
FIG. 905  
FIG. 906  
FIG. 907  
FIG. 908  
FIG. 909  
FIG. 910  
FIG. 911  
FIG. 912  
FIG. 913  
FIG. 914  
FIG. 915  
FIG. 916  
FIG. 917  
FIG. 918  
FIG. 919  
FIG. 920  
FIG. 921  
FIG. 922  
FIG. 923  
FIG. 924  
FIG. 925  
FIG. 926  
FIG. 927  
FIG. 928  
FIG. 929  
FIG. 930  
FIG. 931  
FIG. 932  
FIG. 933  
FIG. 934  
FIG. 935  
FIG. 936  
FIG. 937  
FIG. 938  
FIG. 939  
FIG. 940  
FIG. 941  
FIG. 942  
FIG. 943  
FIG. 944  
FIG. 945  
FIG. 946  
FIG. 947  
FIG. 948  
FIG. 949  
FIG. 950  
FIG. 951  
FIG. 952  
FIG. 953  
FIG. 954  
FIG. 955  
FIG. 956  
FIG. 957  
FIG. 958  
FIG. 959  
FIG. 960  
FIG. 961  
FIG. 962  
FIG. 963  
FIG. 964  
FIG. 965  
FIG. 966  
FIG. 967  
FIG. 968  
FIG. 969  
FIG. 970  
FIG. 971  
FIG. 972  
FIG. 973  
FIG. 974  
FIG. 975  
FIG. 976  
FIG. 977  
FIG. 978  
FIG. 979  
FIG. 980  
FIG. 981  
FIG. 982  
FIG. 983  
FIG. 984  
FIG. 985  
FIG. 986  
FIG. 987  
FIG. 988  
FIG. 989  
FIG. 990  
FIG. 991  
FIG. 992  
FIG. 993  
FIG. 994  
FIG. 995  
FIG. 996  
FIG. 997  
FIG. 998  
FIG. 999  
FIG. 1000

## CLAIMS

What is claimed is:

- 1           1. A mounting structure for at least one display board providing a first mounting  
2 interface and a second mounting interface comprising: a first pivotal interface adapted to  
3 engage the first mounting interface of the display board and a second pivotal interface  
4 adapted to engage the second mounting interface of the display board so that the display  
5 board is removably pivotally mounted within the mounting structure.
- 1           2. The mounting structure of Claim 1 wherein the first pivotal interface includes a  
2 hook.
- 1           3. The mounting structure of Claim 1 wherein the second pivotal interface includes  
2 a post.
- 1           4. The mounting structure of Claim 2 wherein the second pivotal interface includes  
2 a post.
- 1           5. The mounting structure of Claim 2 wherein the first mounting interface of the  
2 display board includes a post engaged by the hook of the first pivotal interface.
- 1           6. The mounting structure of Claim 3 wherein the second mounting interface of the  
2 display boards includes an aperture engaged by the post of the second pivotal interface.
- 1           7. The mounting structure of Claim 1 wherein the first mounting interface and  
2 second mounting interface of the display board are substantially identical.
- 1           8. The mounting structure of Claim 1 further comprising a cap having the first  
2 pivotal interface and a base having the second pivotal interface.

1           9. The mounting structure of Claim 8 further comprising a frame coupling the cap  
2 to the base.

1           10. The mounting structure of Claim 9 wherein the frame is adapted for mounting  
2 to an existing structure.

1           11. The mounting structure of Claim 9 further comprising a cover fitted over the  
2 frame.

1           12. A mounting structure for associating at least one display board providing a  
2 mounting interface with a panel wall having a top and a first side opposing a second side,  
3 which comprises:  
4           a rail having a first end and a second end and at least one track for engagement with  
5 the mounting interface of the display board between the first end and the second end;  
6           an end fitting coupled to each of the first end of the rail and the second end of the  
7 rail including  
8           a hook for placement over the top of the panel wall,  
9           a pivot post coupled to the hook and pivotally coupled to the end fitting,  
10          a spring member coupled to the pivot post within the end fitting tending to draw the  
11 hook into contact with the first side of the panel wall and the end fitting into contact with  
12 the second side of the panel wall.

1           13. The mounting structure of Claim 12 wherein the rail includes two tracks.

1           14. A mounting structure for display of at least one display board comprising:  
2 a frame;  
3 a platform for the display board coupled to the frame;  
4 a compliant retaining system for the display board coupled to the frame;

5 wherein the display board can be placed on the platform and pressed into secure  
6 engagement with the compliant retaining system.

1 15. The mounting structure of Claim 14 wherein the compliant retaining system  
2 includes at least one compliant member.

1 16. The mounting structure of Claim 14 wherein the compliant retaining system  
2 includes a pair of spaced apart compliant members.

1 17. The mounting structure of Claim 15 wherein the compliant member is a grip  
2 member.

1 18. The mounting structure of Claim 17 wherein the grip member includes a  
2 plurality of fins.

1 19. The mounting structure of Claim 17 wherein the grip member is curved.

1 20. The mounting structure of Claim 17 wherein the grip member is straight.

1 21. The mounting structure of Claim 14 wherein the frame is a wall providing a  
2 shelf and the platform rests on the shelf.

1 22. The mounting structure of Claim 14 wherein the frame is a wall and the  
2 platform is coupled to the wall by a mounting bracket.

1 23. The mounting structure of Claim 14 wherein the frame is an easel and the  
2 platform is a tray rigidly connected to the easel.

24. The mounting structure of Claim 23 wherein the compliant retaining system for the display board includes at least one grip member.

25. An easel for use with at least one display board comprising:  
a base;  
a first frame section coupled to the base;  
a second frame section coupled to the base;  
a stowing area formed between the first frame section and second frame section;  
a first tray coupled to the first frame section;  
a second tray coupled to the second frame section;  
wherein a first display board can be placed on display on the first tray, a second display board can be placed on display on the second tray, and a plurality of display boards can be stored in the storage area.

26. The easel of Claim 25 further comprising a pair of compliant members coupled to the first frame section and wherein a display board on the first tray can be pressed into secure engagement between the pair of compliant member.

27. The easel of Claim 25 further comprising a set of wheels coupled to the base.

28. The easel of Claim 27 wherein each of the pair of compliant members is formed of an elastomeric material.

29. A mounting structure associated with an existing structure and for use with at least one display board comprising:  
an articulating frame pivotally coupled to the existing structure for movement between a fully deployed position and a fully stowed position; and  
at least one display rack coupled to the articulating frame and providing an interface for pivotal coupling of a plurality of display boards.

1           30. In an easel having a base and a support frame adapted to provide for the  
2 display of display boards on a tray coupled to the support frame, an improvement  
3 comprising the base the easel having a nested portion and a nesting portion so that one  
4 easel can be nested within another easel.

1           31. The easel of Claim 30 wherein the improvement further comprises the base  
2 having a tapered profile.

1           32. The easel of Claim 31 wherein the improvement further comprises pivotally  
2 coupling the tray to the support frame so that the tray can be move to a stowed position for  
3 nesting.

1           33. In an easel having a base and a support frame adapted to provide for the  
2 display of display boards on a tray coupled to the support frame, an improvement  
3 comprising pivotally coupling the base to the support frame and pivotally coupling the tray  
4 to the support frame.

1           34. The easel of Claim 33 wherein the improvement further comprises a lower tray  
2 coupled to the base, so that at least one display board may be stored or displayed on the  
3 lower tray.

1           35. The easel of Claim 34 wherein the improvement further comprises pivotally  
2 coupling the lower tray to the base.

1           36. The easel of Claim 33 wherein the improvement further comprises providing  
2 the support frame with a pair of compliant grips for engagement with a display board  
3 placed on the tray.





## ABSTRACT

An apparatus for display of information in a work environment is disclosed. The apparatus includes a display board with a substantially rigid core and defines a first side having a first surface and a second side opposite of the first side having a second surface, the first surface having a first surface treatment and the second surface having a second surface treatment. The first surface treatment may include a reusable adhesive and a clear film cover over the reusable adhesive. The display board may have a generally rectangular shape with a first set of corners each having a first multi-functional mounting interface and a second set of corners each having a second mounting interface. A mounting structure for at least one display board is also disclosed. The mounting structure may include a first pivotal interface adapted to engage a first mounting interface of the display board and a second pivotal interface adapted to engage a second mounting interface of the display board so that the display board is pivotally mounted within the mounting structure. The mounting structure may include a frame, a platform for the display board coupled to the frame, and a compliant retaining system for the display board coupled to the frame wherein the display board can be placed on the platform and pressed into secure engagement with the compliant retaining system. An easel for use with at least one display board is further disclosed. The easel may include a base, a first frame section coupled to the base, a second frame section coupled to the base, a stowing area formed between the first frame section and second frame section, a first tray coupled to the first frame section, and a second tray coupled to the second frame section. A first display board can be placed on display on the first tray, a second display board can be placed on display on the second tray, and a plurality of display boards can be stored in the storage area. An easel having a base and a support frame adapted to provide for the display of display boards on a tray coupled to the support frame, having a nested portion and a nesting portion so that one easel can be nested within another easel is further disclosed. An easel having a base and a support frame adapted to provide for the display of display boards on a tray coupled to the support frame, with a pivotal coupling of the base to the support frame and pivotally

coupling the tray to the support frame is further disclosed. An apparatus for display of information in a work environment is further disclosed. A mounting structure for associating at least one display board providing a mounting interface with a panel wall having a top and a first side opposing a second side is further disclosed. The mounting structure may include a rail having a first end and a second end and at least one track for engagement with the mounting interface of the display board between the first end and the second end and an end fitting coupled to each of the first end of the rail and the second end of the rail. The mounting structure may also include a hook for placement over the top of the panel wall, a pivot post coupled to the hook and pivotally coupled to the end fitting, and a spring member coupled to the pivot post within the end fitting tending to draw the hook into contact with the first side of the panel wall and the end fitting into contact with the second side of the panel wall. A mounting structure associated with an existing structure and for use with at least one display board is further disclosed. The mounting structure includes an articulating frame pivotally coupled to the existing structure for movement between a fully deployed position and a fully stowed position and at least one display rack coupled to the articulating frame and providing an interface for pivotal coupling of a plurality of display boards.


+

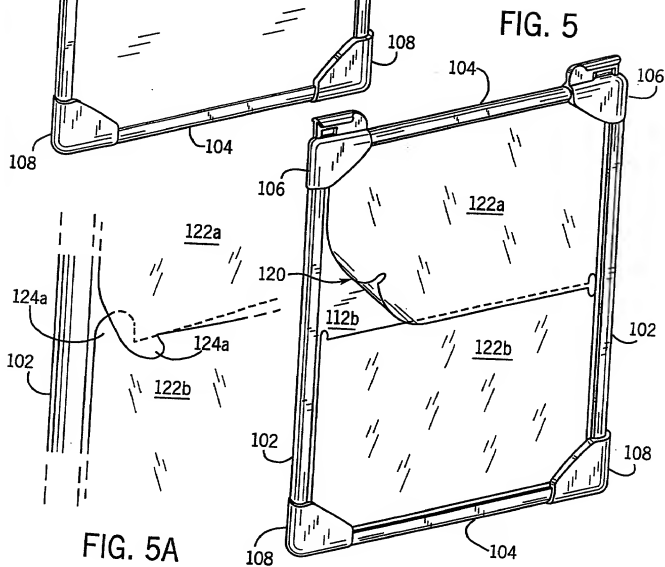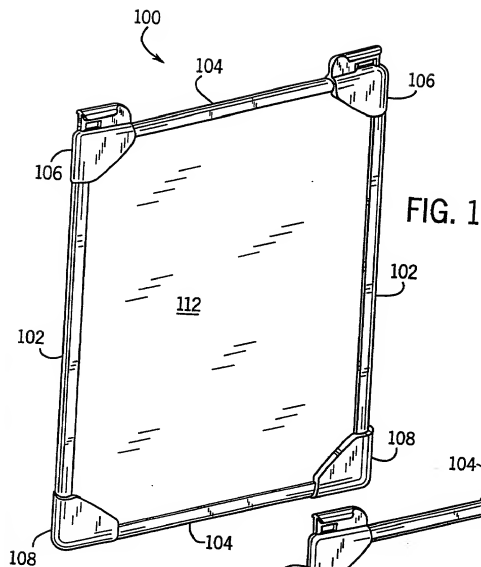

+

+

FIG. 2

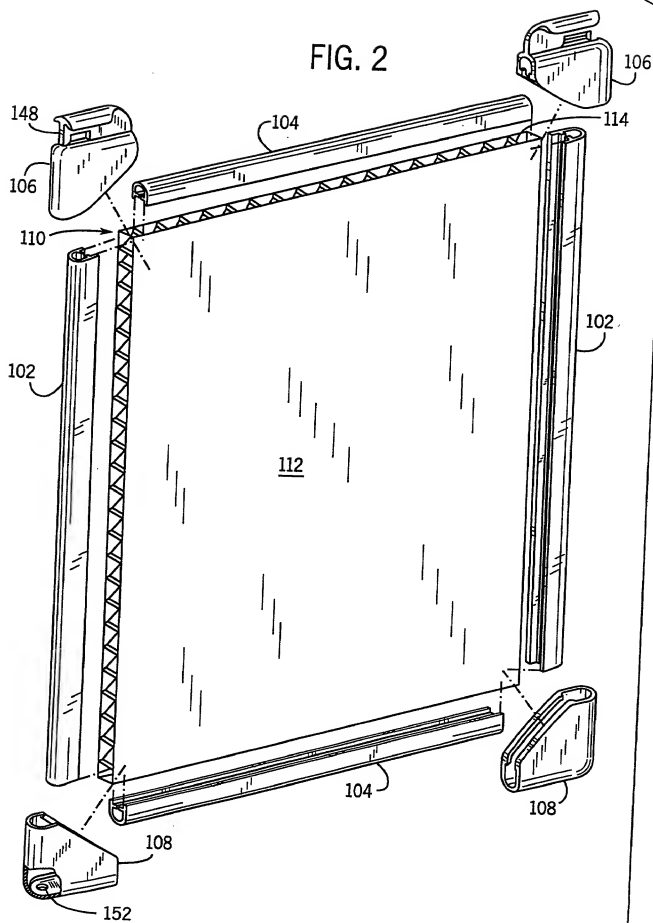

+

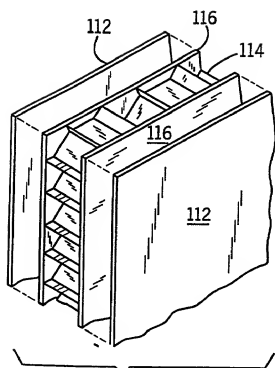


FIG. 3

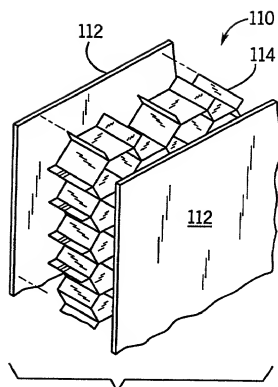


FIG. 4

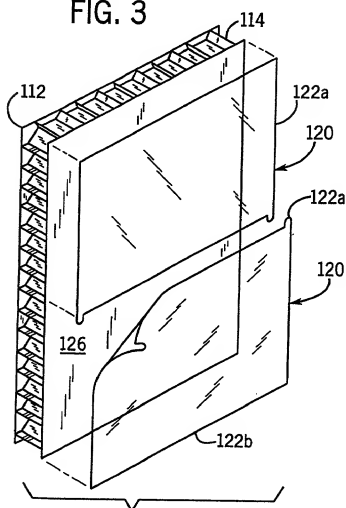


FIG. 6







FIG. 5B

+

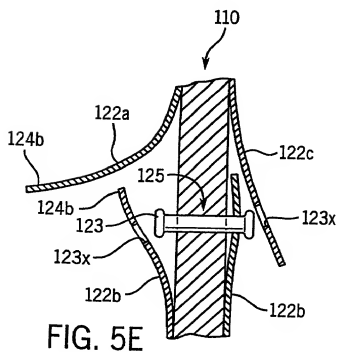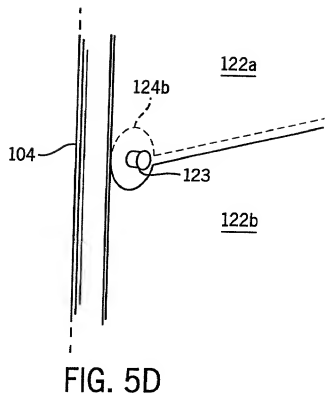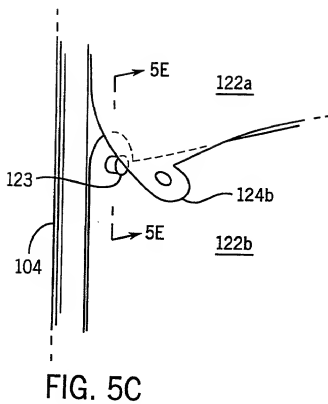

+

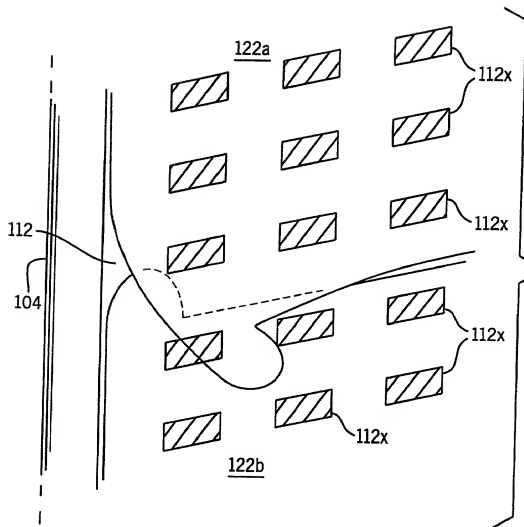


FIG. 6A

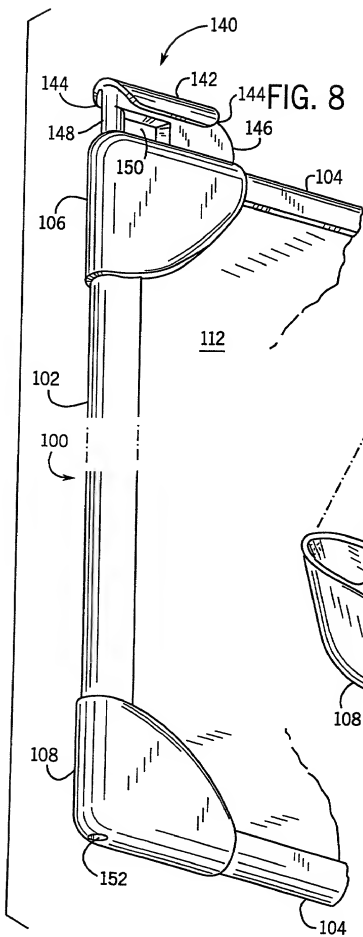


FIG. 8

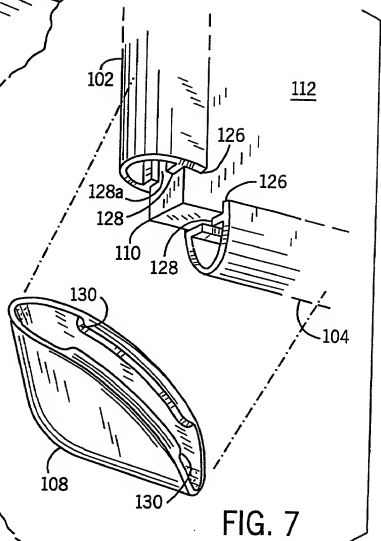


FIG. 7





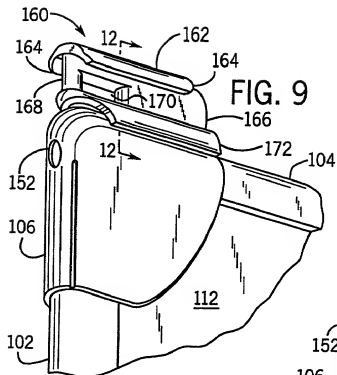


FIG. 9




FIG. 12A

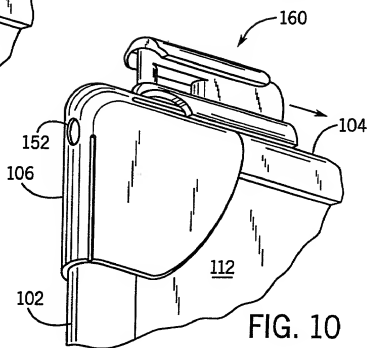


FIG. 10

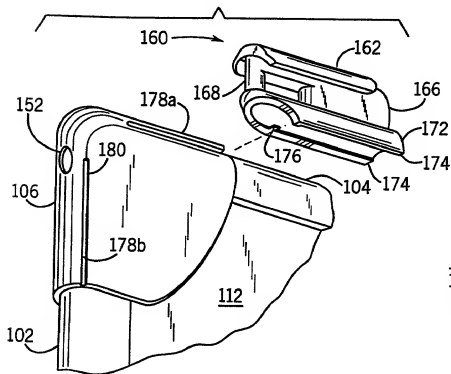


FIG. 11




FIG. 12

+

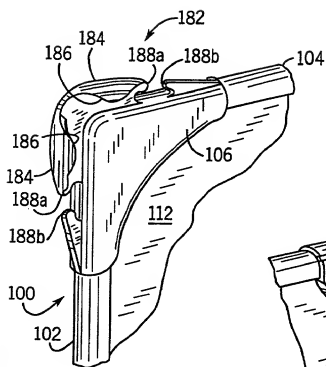


FIG. 13

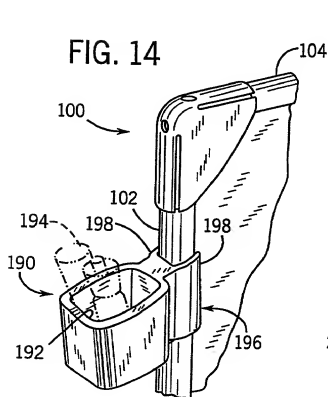
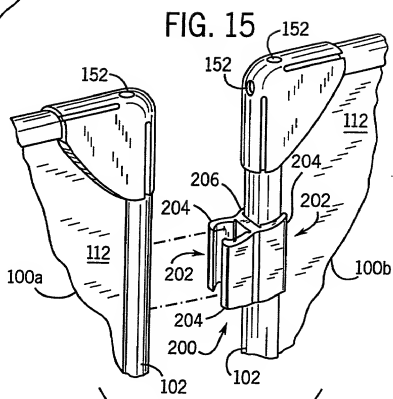


FIG. 14

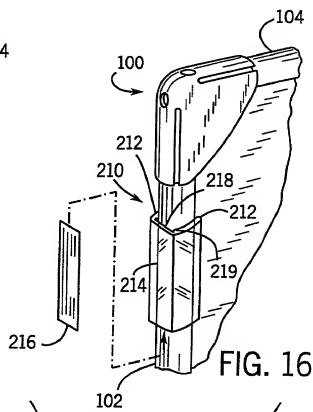


FIG. 16

+

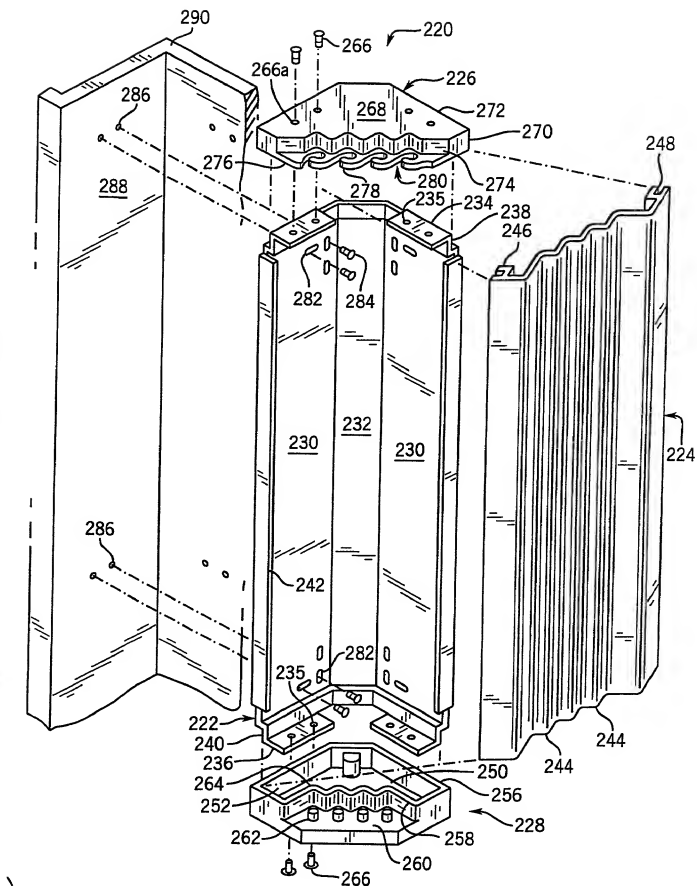


FIG. 17

+

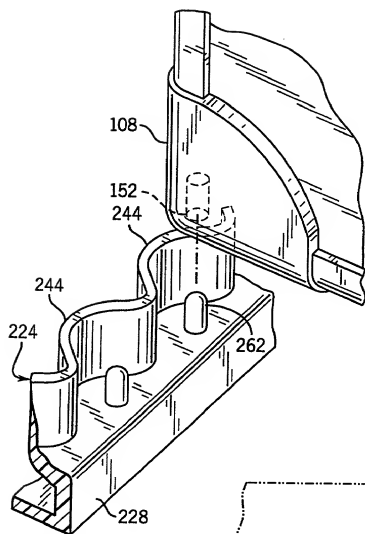


FIG. 18



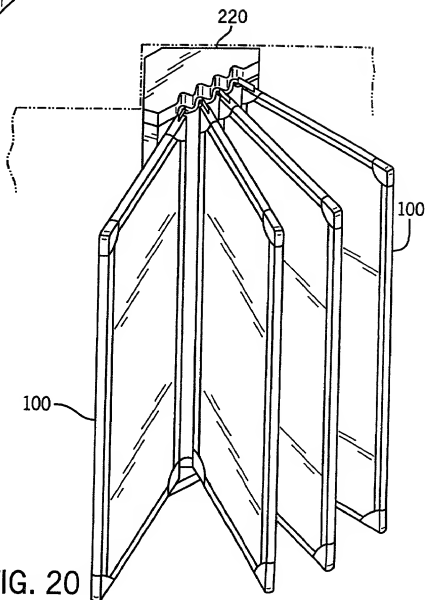


FIG. 20

+

+

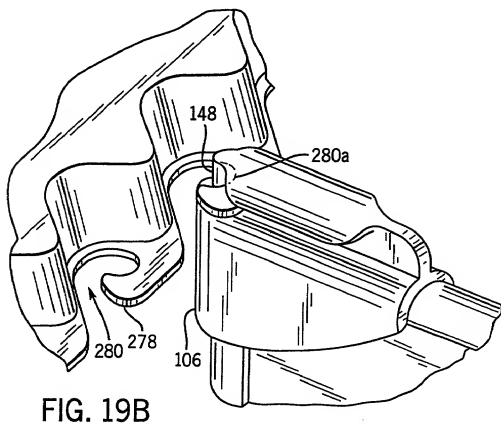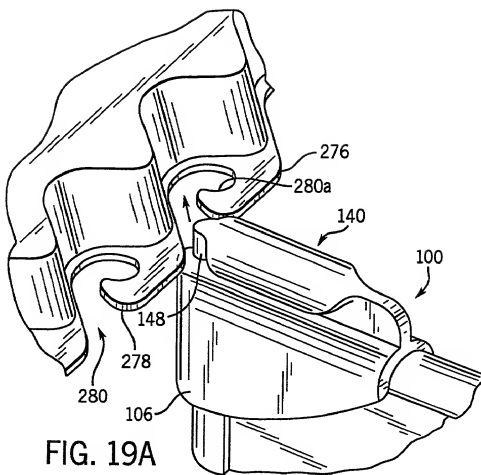

+

FIG. 21


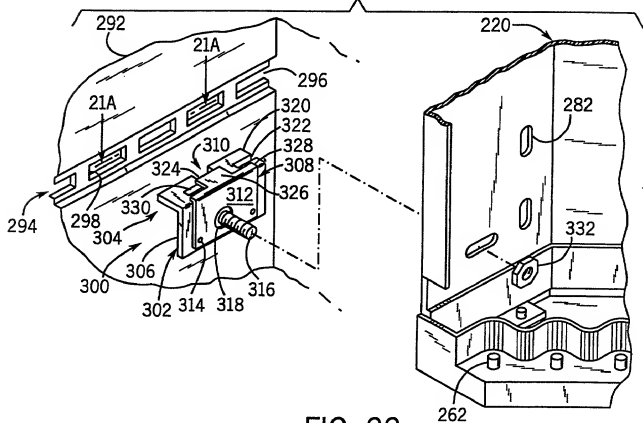


FIG. 22

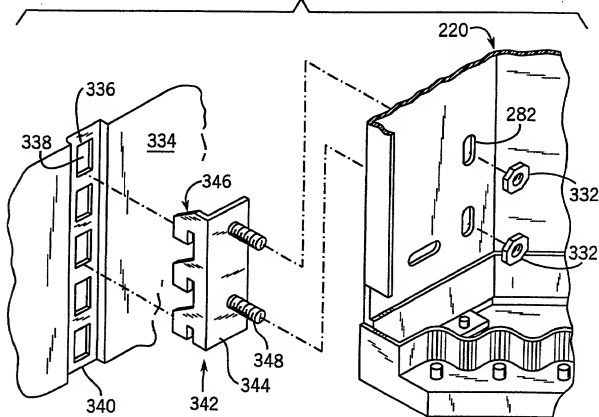

+

FIG. 21A

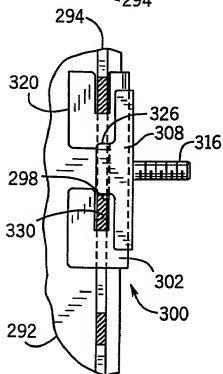
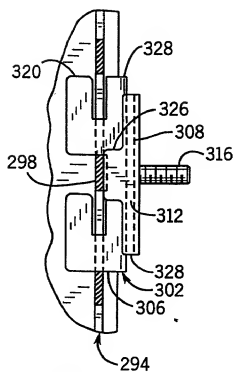


FIG. 21B

FIG. 23


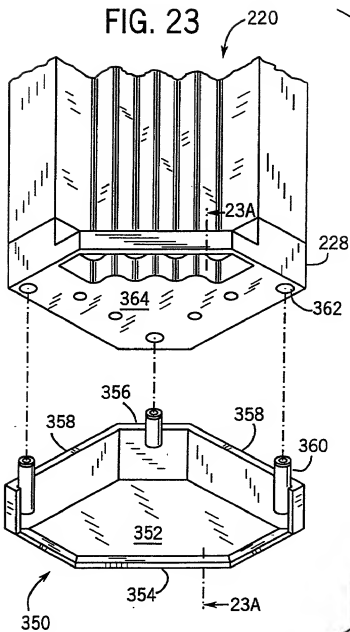


FIG. 23A

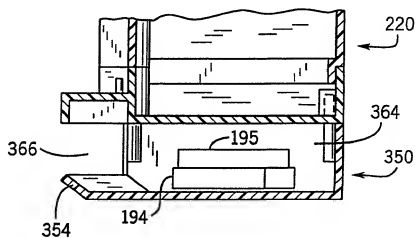

+

+

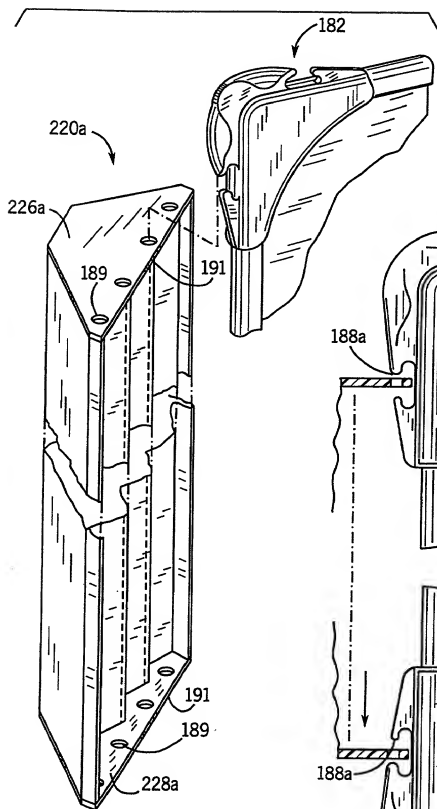


FIG. 23B

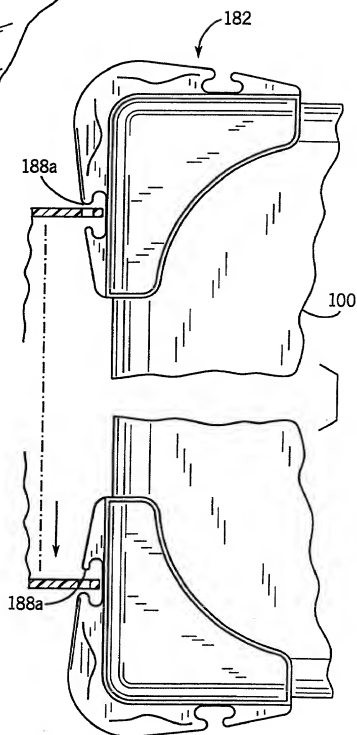


FIG. 23C

+



+

FIG. 24

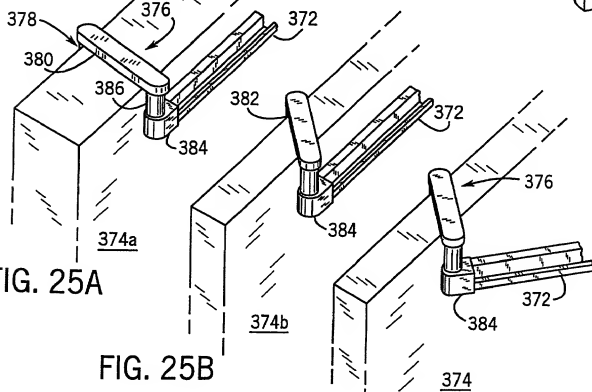
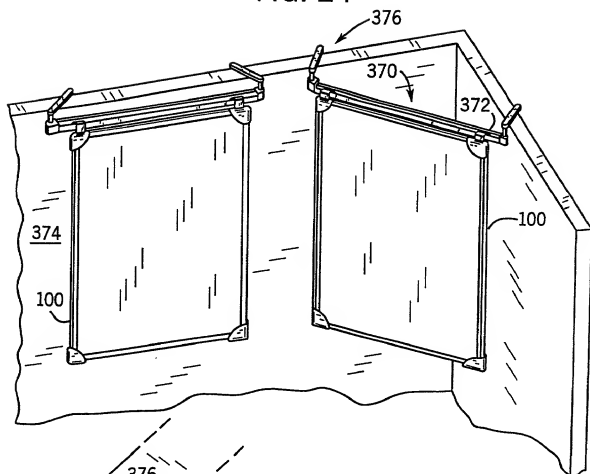


FIG. 25A

FIG. 25B

FIG. 25C

+

+

FIG. 25D


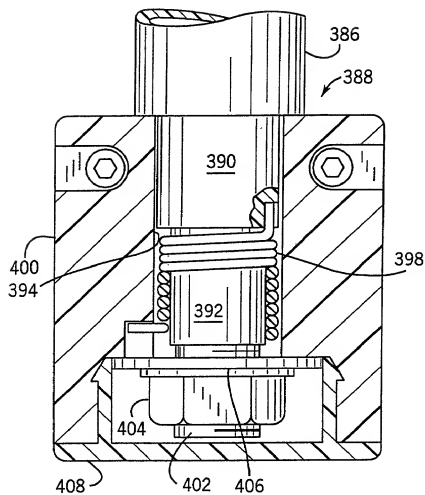


FIG. 33G

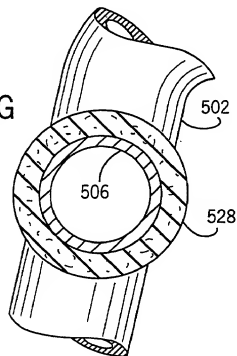

+

+

FIG. 26




FIG. 27

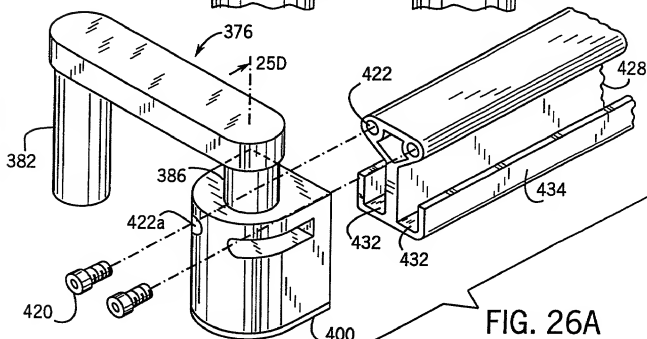



FIG. 26A



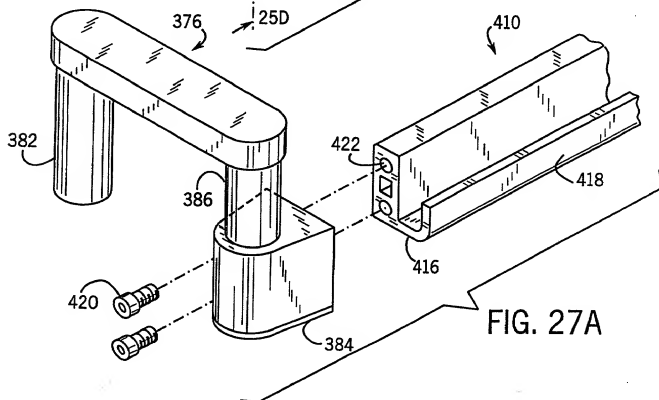


FIG. 27A

+

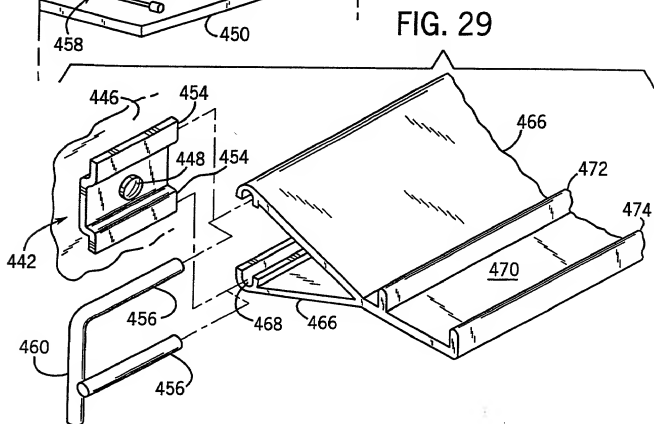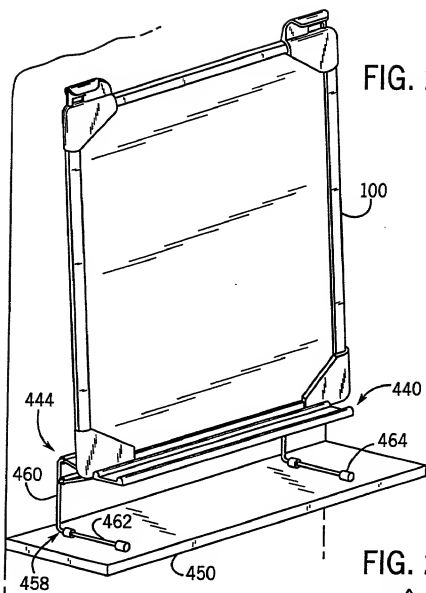

+

FIG. 31

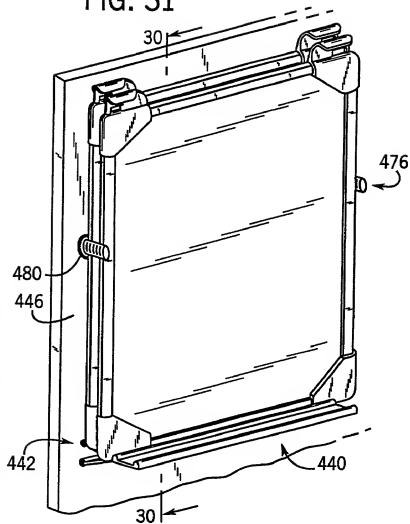


FIG. 32

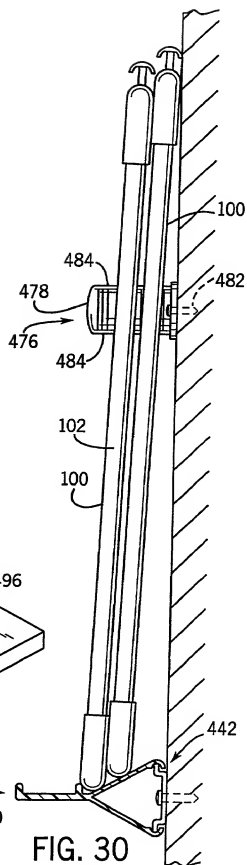
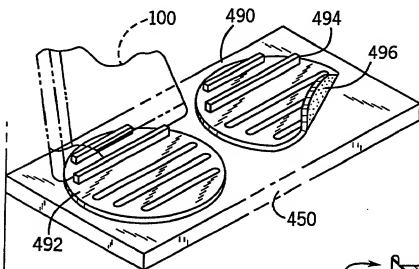


FIG. 30

+

+

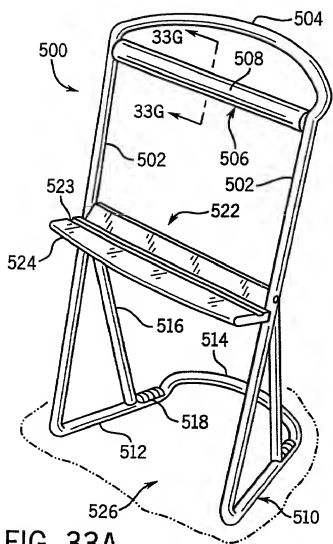


FIG. 33A

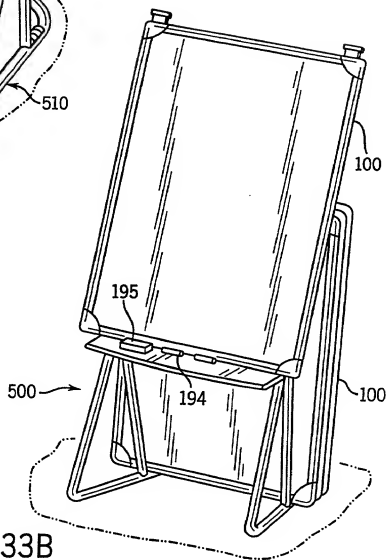


FIG. 33B

+

+

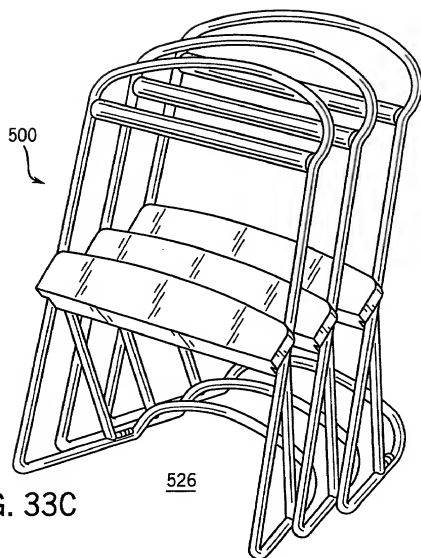


FIG. 33C




FIG. 33D




FIG. 33E




FIG. 33F

+

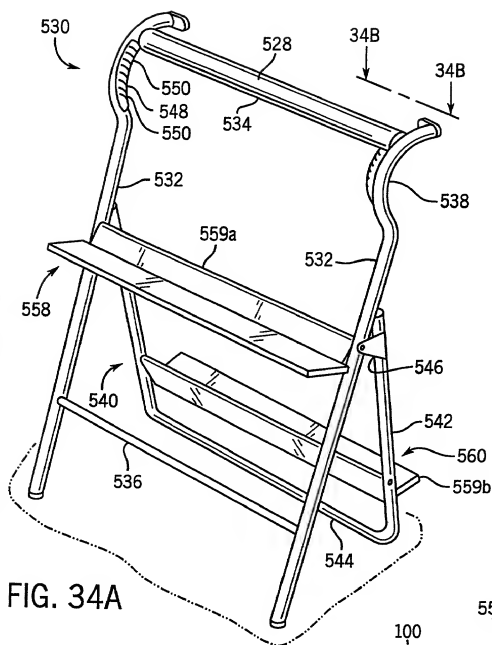


FIG. 34A




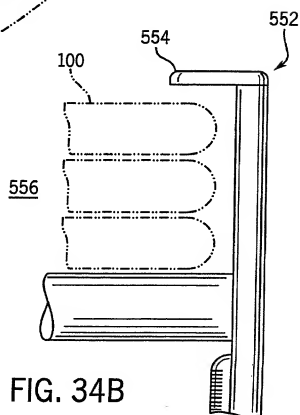


FIG. 34B

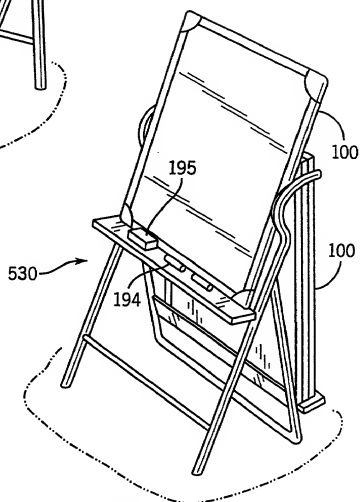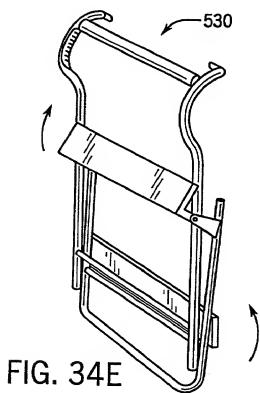

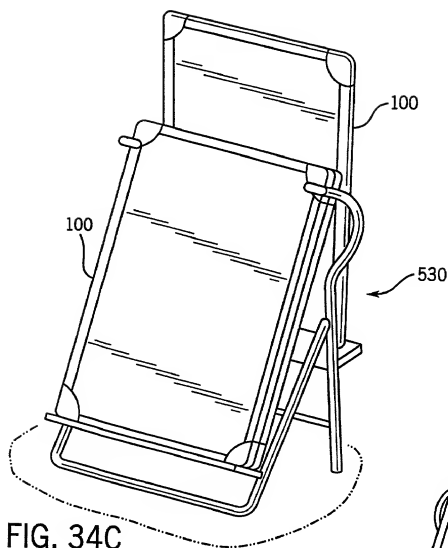

+ FIG. 35

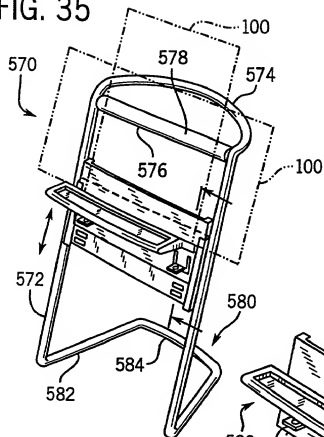


FIG. 36

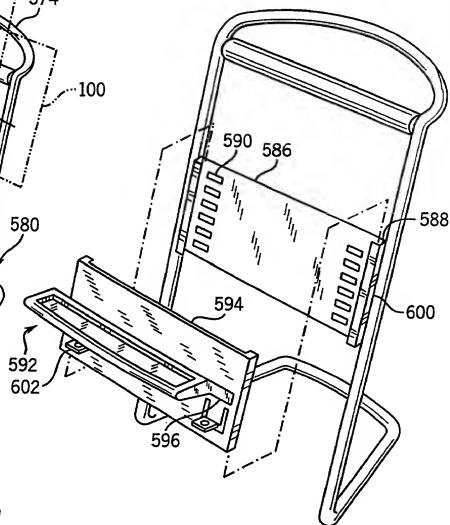


FIG. 37A


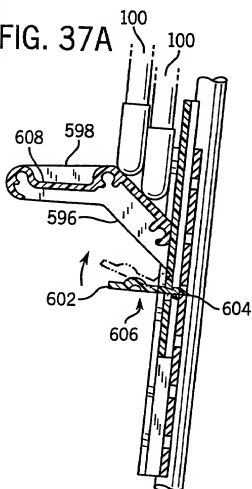


FIG. 37B

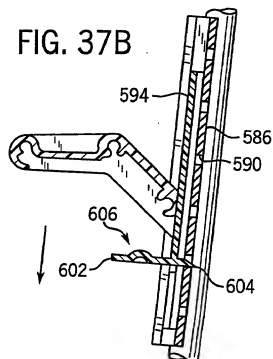

+

FIG. 38

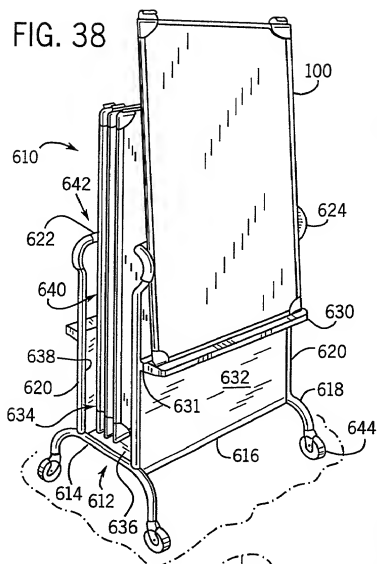


FIG. 39

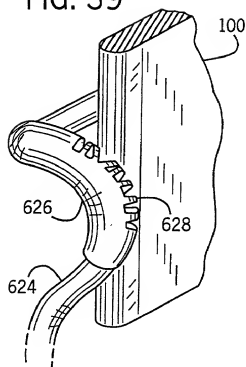


FIG. 40





FIG. 41

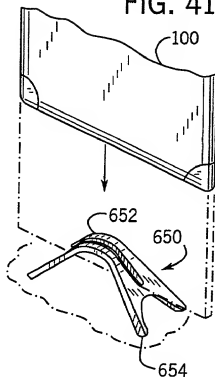

+

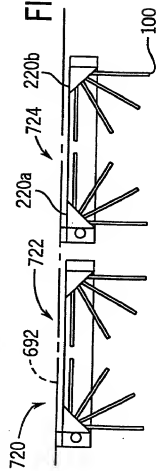


FIG. 42

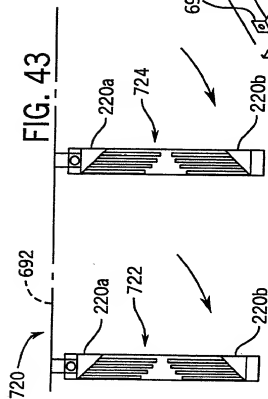


FIG. 43


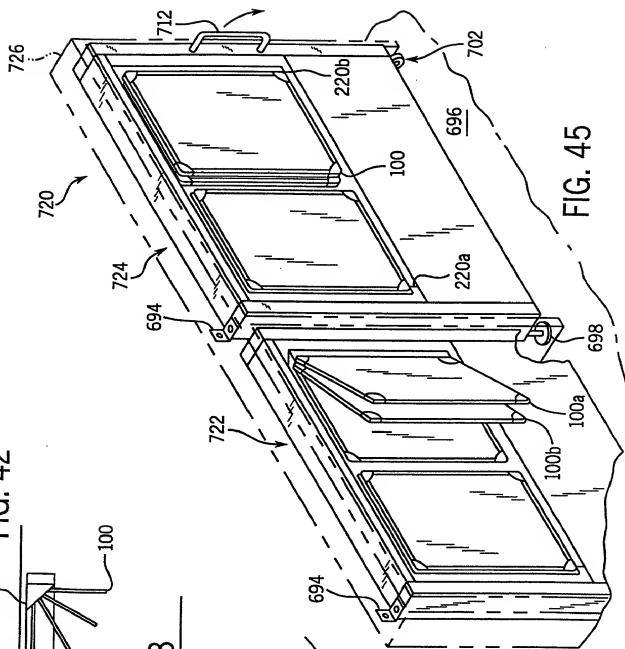


FIG. 45

+

FIG. 44

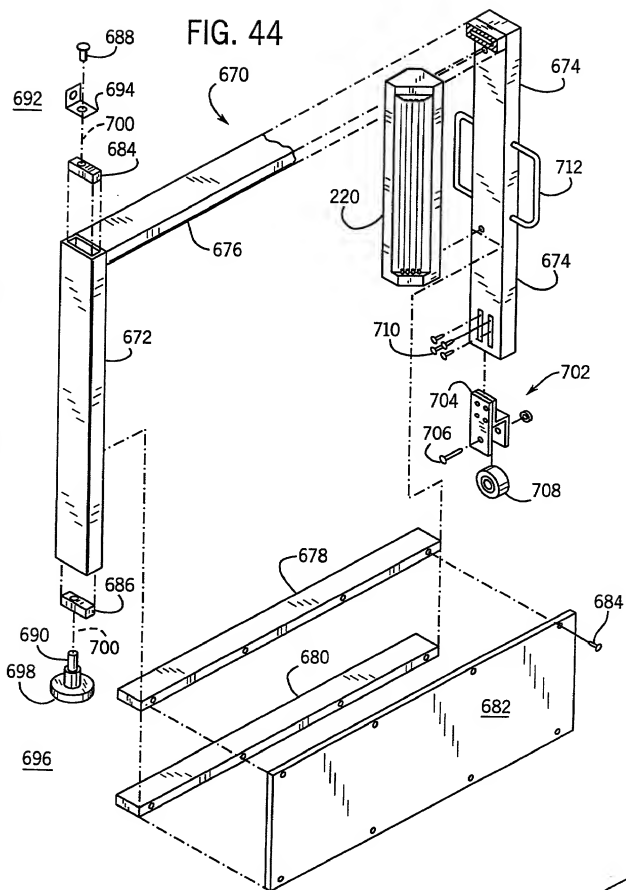

+

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I HEREBY DECLARE:

THAT my residence, post office address, and citizenship are as stated below next to my name;

THAT I believe I am the original, first, and sole inventor (if only one inventor is named below) or an original, first, and joint inventor (if plural inventors are named below or in an attached Declaration) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DISPLAY BOARD SYSTEM

(Attorney Docket No. 26167-569)

the specification of which (check one)

  X   is attached hereto.

       was filed on                      as United States Application Number or PCT International Application Number                      and was amended on                      (if applicable).

THAT I do not know and do not believe that the same invention was ever known or used by others in the United States of America, or was patented or described in any printed publication in any country, before I (we) invented it;

THAT I do not know and do not believe that the same invention was patented or described in any printed publication in any country, or in public use or on sale in the United States of America, for more than one year prior to the filing date of this United States application;

THAT I do not know and do not believe that the same invention was first patented or made the subject of an inventor's certificate that issued in any country foreign to the United States of America before the filing date of this United States application if the foreign application was filed by me (us), or by my (our) legal representatives or assigns, more than twelve months (six months for design patents) prior to the filing date of this United States application;

THAT I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment specifically referred to above;

THAT I believe that the above-identified specification contains a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains, or with which it is most nearly connected, to make and use the invention, and sets forth the best mode contemplated by me of carrying out the invention; and

THAT I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I HEREBY CLAIM foreign priority benefits under Title 35, United States Code §119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's

certificate or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number	Country	Foreign Filing Date	Priority Claimed?	Certified Copy Attached?

I HEREBY CLAIM the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

U.S. Provisional Application Number	Filing Date

I HEREBY CLAIM the benefit under Title 35, United States Code, §120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Application Number	Parent Filing Date	Parent Patent Number

I HEREBY APPOINT the following registered attorneys and agents of the law firm of FOLEY & LARDNER to have full power to prosecute this application and any continuations, divisions, reissues, and reexaminations thereof, to receive the patent, and to transact all business in the United States Patent and Trademark Office connected therewith:

RUSSELL J. BARRON	Reg. No. 29,512
DAVID J. BATES	Reg. No. 39,902
STEVEN C. BECKER	Reg. No. 42,308
DOUGLAS A. BOEHM	Reg. No. 32,014
EDWARD W. BROWN	Reg. No. 22,022
LISA A. BRZYCKI	Reg. No. 40,826
JOHN C. COOPER III	Reg. No. 26,416
JEFFREY N. COSTAKOS	Reg. No. 34,144
WILLIAM J. DICK	Reg. No. 22,205
BARRY L. GROSSMAN	Reg. No. 30,844
KEITH D. LINDENBAUM	Reg. No. 40,365
RICHARD J. MC KENNA	Reg. No. 35,610
JAMES G. MORROW	Reg. No. 32,505
S. MICHAEL PATTON	Reg. No. 36,235
JOHN T. PIENKOS	Reg. No. 42,997
TODD A. RATHE	Reg. No. 38,276
C. THOMAS SYLKE	Reg. No. 32,312
PETER J. VOGEL	Reg. No. 41,363

JOSEPH N. ZIEBERT  
WALTER E. ZIMMERMAN

Reg. No. 35,421  
Reg. No. 40,883



and I request that all correspondence be directed to:

Walter E. Zimmerman  
FOLEY & LARDNER  
Firststar Center  
777 East Wisconsin Avenue  
Milwaukee, Wisconsin 53202-5367

Telephone: 414-297-5550  
Facsimile: 414-297-4900

I UNDERSTAND AND AGREE THAT the foregoing attorneys and agents appointed by me to prosecute this application do not personally represent me or my legal interests, but instead represent the interests of the legal owner(s) of the invention described in this application.

I FURTHER DECLARE THAT all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Name of first inventor	Charles Anthony Seiber
Residence	Atherton, CA
Citizenship	United States of America
Post Office Address	144 Burns Avenue, Atherton, CA 94027
Inventor's signature	
Date	10/28/98
Name of second inventor	Robert Peter Arko
Residence	Palo Alto, CA
Citizenship	United States of America
Post Office Address	443 Ferne Avenue, Palo Alto, CA 94306
Inventor's signature	
Date	10.28.98



Name of third inventor

Otto Daniel DeRuntz

Residence

Dunstable, MA

Citizenship

United States of America

Post Office Address

20 Kimberly Lane, Dunstable, MA 01827

Inventor's signature

*Otto Daniel DeRuntz*

Date

10/27/98

Name of fourth inventor

William Charles Stewart

Residence

Providence, RI

Citizenship

United States of America

Post Office Address

88 Taft Avenue, Providence, RI 02906

Inventor's signature

*William Charles Stewart*

Date

10.27.98

Name of fifth inventor

Steven Ryutaro Takayama

Residence

Atherton, CA

Citizenship

Japan

Post Office Address

144 Burns Avenue, Atherton, CA 94027

Inventor's signature

Date

Oct 28, 1998

Name of sixth inventor

Frank Friedman

Residence

Mill Valley, CA

Citizenship

United States of America

Post Office Address

77 South Knoll Road, CA 94941

Inventor's signature

Date

Name of seventh inventor

Kristine Rene Chan-Lizardo

Residence

Redwood City, CA

Citizenship

United States of America

Post Office Address

707 Leahy Street, #310A, Redwood City, CA 94061

Inventor's signature

Date

10.28.98